


复合式紧急冲淋洗眼器

紧急冲淋洗眼器是广泛使用于医药、化工、石化、电子、半导体企业中危险工作区域和实验室的紧急救护安全装置。当发生化学液体或者有毒物质溅到工作人员身体、脸、眼或发生火灾引起工作人员衣物着火时，该装置能迅速将危害降到最低程度，减少有毒有害物质对工作人员身体伤害。

Emergency Shower & Eye Wash

As first aid equipment, emergency shower and eye wash units are widely used at working area and laboratories in the fields of pharmaceutical, chemical, petrochemical, electronics, semi-conductor industries , where danger tends to occur unexpectedly. In the event of an accident of chemical or poison spill or fire, this equipment delivers water to rinse contaminants from a user's body, face, and eyes, so as to minimize damage and harm to injured worker.

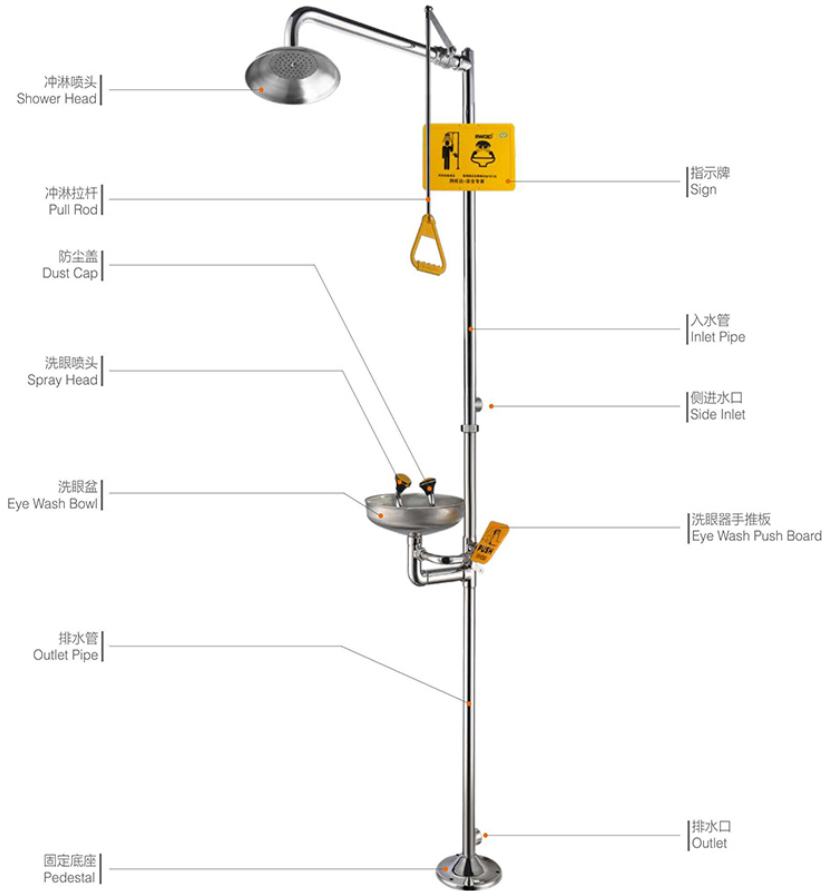

RWD 紧急冲淋洗眼器执行 GB/T 38144.1—2019 国标

RWD 紧急冲淋洗眼器采用美国先进技术，符合美标 ANSI Z358.1-2014，产品依据 GB/T 38144.1—2019 标准生产。该标准中对紧急冲淋洗眼器每个组成部分的长度、高度、水流量、水流在定点高度的截面积等方面都做了详细的规定，RWD 紧急冲淋洗眼器系列均能达到标准。在此之上，RWD 紧急冲淋洗眼器系列洗眼喷头高度与角度完全依照面部比例设计，出水孔经过特殊处理，喷出的水更加温和，使用过程中不会因水流过激伤害眼睛与眼睛内部的神经。

RWD Emergency Shower & Eye Wash in Accordance with GB/T 38144.1—2019

RWD emergency forest eye washer adopts advanced American technology, conforms to American standard ANSI Z358.1-2014, and the products are produced according to GB/T 38144.2-2019 standard., which sets standard for length, height, flow volume and spray area, etc.,for emergency equipment. Eye wash is ergonomically designed with two spray heads, height and angle of the heads offer face most comfort. The specially designed spray holes soften water spray and protect eyes effectively.



复合式紧急冲淋洗眼器

- 材质: SS304
- 表面处理: 精细抛光, 以增强产品耐腐蚀能力
- 安装特点: 采用“插入式”快接方式, 安装时长较传统洗眼器时长缩短 2/3
- 使用功能: 喷淋 + 洗眼 (可同时使用, 也可分开使用)
- 开关球阀: 两片式快开球阀
- 喷淋喷头: 旋压式卷边工艺设计, 直径 250mm
- 管道直径: 38mm
- 公称压力: 1.0Mpa
- 工作压力: 0.2 ~ 0.4Mpa
- 测试压力: 1.5Mpa
- 使用环境温度: 0°C ~ 40°C
- 喷淋水流量: ≥ 76 L/min
- 洗脸 / 洗眼水流量: ≥ 11.4 L/min
- 洗眼盆: 300mm 直边设计, 聚水集中, 防止飞溅
- 防尘盖: 主体一体式设计, 不易丢失
- 洗眼喷头特点: 专利设计, 自带双流量调节阀
- 进水口尺寸: 1" 英制内螺纹
- 排水口尺寸: 1" 英制内螺纹
- 进水口高度: 1201mm
- 排水口高度: 86mm
- 洗眼喷头间距: 170mm
- 出水范围: 距站立面 1520mm 高度, 出水范围直径至少为 510mm

★备注: 进、排水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器。
可添加不锈钢脚踏板控制洗眼开关。

COMBINED EMERGENCY SHOWER & EYE WASH

- Material: Stainless Steel 304
- Surface finishing: fine-polished, which makes the pipe surface performs better on corrosion resistance
- Assembling feature: pipes connected by innovative inserting & turning
- Usage: drenching body and rinsing faces / eyes can be operated separately or simultaneously
- Shower & eye wash switch: two-piece ball valve
- Shower head: spinning-formed with curled rim, diameter 250 mm
- Pipe diameter: 38 mm
- Nominal pressure: 1.0 Mpa
- Working pressure: 0.2~0.4 Mpa
- Testing pressure: 1.5 Mpa
- Temperature requirement on working environment: 0°C~40°C
- Flow rate of body shower: ≥ 76 L/min
- Flow rate of eye/face wash: ≥ 11.4 L/min
- Eyewash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Dust cover: integrated with the spray head (not connected by chain) and easily removed by water flow.
- Spray head feature: patented design, each spray head equips with one water-flow control valve
- Inlet thread: Rp 1", female
- Outlet thread: Rp 1", female
- Inlet height (from above the floor): 1201 mm
- Outlet height (from above the floor): 86 mm
- Distance between spray heads: 170 mm
- Water pattern coverage: at the height of 1520 mm above floor, the water pattern covers a circular area of at least 510 mm in diameter

★ Notes: the inlet part and outlet part are customizable;
shutoff valve and filter are proposed to be equipped on the water-supply end;
stainless steel – made foot treadle is optional as eye wash switch



WJH0358A-3

复合式紧急冲淋洗眼器

- 材质: SS304
- 表面处理: 高亮度环氧树脂涂层
- 安装特点: 采用“插入式”快接方式, 安装时长较传统洗眼器时长缩短 2/3
- 使用功能: 喷淋 + 洗眼 (可同时使用, 也可分开使用)
- 开关球阀: 两片式快开球阀
- 喷淋喷头: 旋压式卷边工艺设计, 直径 250mm
- 管道直径: 38mm
- 公称压力: 1.0Mpa
- 工作压力: 0.2 ~ 0.4Mpa
- 测试压力: 1.5Mpa
- 使用环境温度: 0°C ~ 40°C
- 喷淋水流量: ≥ 76 L/min
- 洗脸 / 洗眼水流量: ≥ 11.4 L/min
- 洗眼盆: PC 可视化透明盖, 洗眼盆 ABS 材质
- 洗眼喷头特点: 专利设计, 自带双流量调节阀
- 进水口尺寸: 1" 英制内螺纹
- 排水口尺寸: 1" 英制内螺纹
- 进水口高度: 1186mm
- 排水口高度: 86mm
- 洗眼喷头间距: 170mm
- 出水范围: 距站立面 1520mm 高度, 出水范围直径至少为 510mm

★备注: 进、排水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器。

COMBINED EMERGENCY SHOWER & EYE WASH

- Material: Stainless Steel 304
- Surface finishing: glossy epoxy coated
- Assembling feature: pipes connected by innovative inserting & turning
- Usage: drenching body and rinsing faces / eyes can be operated separately or simultaneously
- Shower & eye wash switch: two-piece ball valve
- Shower head: spinning-formed with curled rim, diameter 250 mm
- Pipe diameter: 38 mm
- Nominal pressure: 1.0 Mpa
- Working pressure: 0.2~0.4 Mpa
- Testing pressure: 1.5 Mpa
- Temperature requirement on working environment: 0°C~40°C
- Flow rate of body shower: ≥ 76 L/min
- Flow rate of eye/face wash: ≥ 11.4 L/min
- Eyewash bowl features: ABS bowl, transparent PC bowl cover
- Spray head feature: patented design, each spray head equips with one water-flow control valve
- Inlet thread: Rp 1", female
- Outlet thread: Rp 1", female
- Inlet height (from above the floor): 1186 mm
- Outlet height (from above the floor): 86 mm
- Distance between spray heads: 170 mm
- Water pattern coverage: at the height of 1520 mm above floor, the water pattern covers a circular area of at least 510 mm in diameter

★ Notes: the inlet part and outlet part are customizable;
shutoff valve and filter are proposed to be equipped on the water-supply end.



WJH0358A-3L (带翻盖洗眼器)

复合式紧急冲淋洗眼器

- 材质: SS304
- 表面处理: 精细抛光 / 高亮度环氧树脂涂层
- 安装特点: 采用“由任式”管道连接方式, 能够快速的装配和拆卸
- 使用功能: 喷淋 + 洗眼 (可同时使用, 也可分开使用)
- 开关球阀: 两片式快开球阀
- 喷淋喷头: 旋压式卷边工艺设计, 直径 250mm
- 管道直径: 38mm
- 公称压力: 1.0Mpa
- 工作压力: 0.2 ~ 0.4Mpa
- 测试压力: 1.5Mpa
- 使用环境温度: 0°C ~ 40°C
- 喷淋水流量: ≥ 76 L/min
- 洗脸 / 洗眼水流量: ≥ 11.4 L/min
- 洗眼盆: 300mm 直边设计, 聚水集中, 防止飞溅
- 防尘盖: 主体一体式设计, 不易丢失
- 洗眼喷头特点: 专利设计, 自带双流量调节阀
- 进水口尺寸: 1" 英制内螺纹
- 排水口尺寸: 1" 英制内螺纹
- 进水口高度: 1186mm
- 排水口高度: 86mm
- 洗眼喷头间距: 170mm
- 出水范围: 距站立面 1520mm 高度, 出水范围直径至少为 510mm

★备注: 进、排水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器。
可添加不锈钢脚踏板, 控制洗眼开关。

COMBINED EMERGENCY SHOWER & EYE WASH

- Material: Stainless Steel 304
- Surface finishing: Fine polish/high brightness antioxidant coating
- Assembling feature: the "Union" allows easier pipe connection and disconnection
- Usage: drenching body and rinsing faces / eyes can be operated separately or simultaneously
- Shower & eye wash switch: two-piece ball valve
- Shower head: spinning-formed with curled rim, diameter 250 mm
- Pipe diameter: 38 mm
- Nominal pressure: 1.0 Mpa
- Working pressure: 0.2~0.4 Mpa
- Testing pressure: 1.5 Mpa
- Temperature requirement on working environment: 0°C~40°C
- Flow rate of body shower: ≥ 76 L/min
- Flow rate of eye/face wash: ≥ 11.4 L/min
- Flow rate of eye wash: ≥ 1.5 L/min
- Eyewash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Dust cover: integrated with the spray head (not connected by chain) and easily removed by water flow.
- Spray head feature: patented design, each spray head equips with one water-flow control valve
- Inlet thread: Rp 1", female
- Outlet thread: Rp 1", female
- Inlet height (from above the floor): 1186 mm
- Outlet height (from above the floor): 86 mm
- Distance between spray heads: 170 mm
- Water pattern coverage: at the height of 1520 mm above floor, the water pattern covers a circular area of at least 510 mm in diameter

★ Notes: the inlet part and outlet part are customizable;
shutoff valve and filter are proposed to be equipped on the water-supply end;
stainless steel - made foot treadle is optional as eye wash switch.



WJH0358A-1

- 采用“由任式”管道连接方式, 能快速的装配和拆卸, 方便安装和日常维护。
Adopt UNION type pipe connection, can quickly assemble and disassembled, is easy to install and daily maintenance.



WJH0358A (红色)



WJH0358A (黄色)

复合式紧急冲淋洗眼器

- 材质: SS304
- 表面处理: 精细抛光 / 高亮度环氧树脂涂层
- 安装特点: 采用“由任式”管道连接方式, 能够快速的装配和拆卸
- 使用功能: 喷淋 + 洗眼 (可同时使用, 也可分开使用)
- 开关球阀: 两片式快开球阀
- 喷淋喷头: 旋压式卷边工艺设计, 直径 250mm
- 管道直径: 38mm
- 公称压力: 1.0Mpa
- 工作压力: 0.2 ~ 0.4Mpa
- 测试压力: 1.5Mpa
- 使用环境温度: 0°C ~ 40°C
- 喷淋水流量: ≥ 76 L/min
- 洗脸 / 洗眼水流量: ≥ 11.4 L/min
- 洗眼盆: 300mm 直边设计, 聚水集中, 防止飞溅
- 防尘盖: 主体一体式设计, 不易丢失
- 洗眼喷头特点: 专利设计, 自带双流量调节阀
- 进水口尺寸: 1" 英制内螺纹
- 排水口尺寸: 1" 英制内螺纹
- 进水口高度: 1186mm
- 排水口高度: 86mm
- 洗眼喷头间距: 170mm
- 出水范围: 距站立面 1520mm 高度, 出水范围直径至少为 510mm

★备注: 进、排水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器。
可添加不锈钢脚踏板, 控制洗眼开关。

COMBINED EMERGENCY SHOWER & EYE WASH

- Material: Stainless Steel 304
- Surface finishing: fine-polished / glossy epoxy coated
- Assembling feature: the "Union" allows easier pipe connection and disconnection
- Usage: drenching body and rinsing faces / eyes can be operated separately or simultaneously
- Shower & eye wash switch: two-piece ball valve
- Shower head: spinning-formed with curled rim, diameter 250 mm
- Pipe diameter: 38 mm
- Nominal pressure: 1.0 Mpa
- Working pressure: 0.2~0.4 Mpa
- Testing pressure: 1.5 Mpa
- Temperature requirement on working environment: 0°C~40°C
- Flow rate of body shower: ≥ 76 L/min
- Flow rate of eyeface wash: ≥ 11.4 L/min
- Eyewash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Dust cover: integrated with the spray head (not connected by chain) and easily removed by water flow.
- Spray head feature: patented design, each spray head equips with one water-flow control valve
- Inlet thread: Rp 1", female
- Outlet thread: Rp 1", female
- Inlet height (from above the floor): 1186 mm
- Outlet height (from above the floor): 86 mm
- Distance between spray heads: 170 mm
- Water pattern coverage: at the height of 1520 mm above floor, the water pattern covers a circular area of at least 510 mm in diameter


★ Notes: the inlet part and outlet part are customizable;
shutoff valve and filter are proposed to be equipped on the water-supply end;
stainless steel - made foot treadle is optional as eye wash switch



- 采用“由任式”管道连接方式, 能快速的装配和拆卸, 方便安装和日常维护。
Adopt UNION type pipe connection, can quickly assemble and disassembled, is easy to install and daily maintenance.



WJH0858

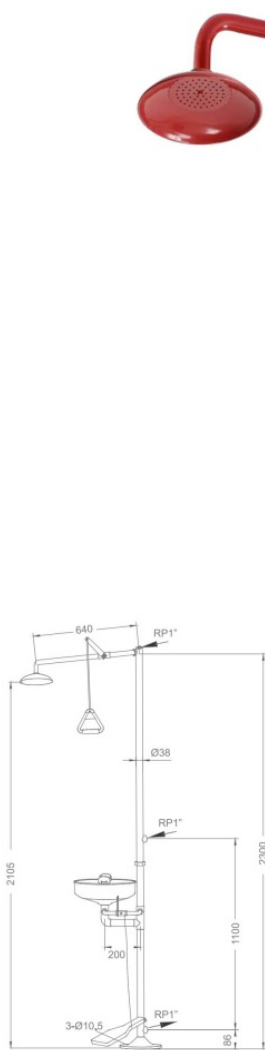

WJH0858 (红色)



WJH0858 (黄色)

复合式紧急冲淋洗眼器

- 材质: SS304
- 表面处理: 精细抛光 增强产品耐腐蚀能力
- 安装特点: 采用“由任式”管道连接方式, 能够快速的装配和拆卸
- 使用功能: 喷淋 + 洗眼 (可同时使用, 也可分开使用)
- 开关球阀: 两片式快开球阀
- 喷淋喷头: 旋压式卷边工艺设计, 直径 250mm
- 管道直径: 38mm
- 公称压力: 1.0Mpa
- 工作压力: 0.2 ~ 0.4Mpa
- 测试压力: 1.5Mpa
- 使用环境温度: 0°C ~ 40°C
- 喷淋水流量: $\geq 76\text{L/min}$
- 洗脸 / 洗眼水流量: $\geq 11.4\text{L/min}$
- 洗眼盆: 300mm 直边设计, 聚水集中, 防止飞溅
- 不锈钢防尘盖: 盖体一体式开关设计, 有效隔离粉尘
- 防尘盖: 主体一体式设计, 不易丢失
- 洗眼喷头特点: 专利设计, 自带双流量调节阀
- 进水口尺寸: 1" 英制内螺纹
- 排水口尺寸: 1" 英制内螺纹
- 进水口高度: 1160mm
- 排水口高度: 90mm
- 洗眼喷头间距: 170mm
- 出水范围: 距站立面 1520mm 高度, 出水范围直径至少为 510mm

★备注: 进、排水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器。

COMBINED EMERGENCY SHOWER & EYE WASH

- Material: Stainless Steel 304
- Surface finishing: fine-polished, which makes the pipe surface performs better on corrosion resistance
- Assembling feature: the "Union" allows easier pipe connection and disconnection
- Usage: drenching body and rinsing faces / eyes can be operated separately or simultaneously
- Shower & eye wash switch: two-piece ball valve
- Shower head: spinning-formed with curled rim, diameter 250 mm
- Pipe diameter: 38 mm
- Nominal pressure: 1.0 Mpa
- Working pressure: 0.2~0.4 Mpa
- Testing pressure: 1.5 Mpa
- Temperature requirement on working environment: 0°C~40°C
- Flow rate of body shower: $\geq 76\text{L/min}$
- Flow rate of eye/face wash: $\geq 11.4\text{L/min}$
- Eyewash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Dust cover: integrated with the spray head (not connected by chain) and easily removed by water flow.
- Spray head feature: patented design, each spray head equips with one water-flow control valve
- Inlet thread: Rp 1", female
- Outlet thread: Rp 1", female
- Inlet height (from above the floor): 1160 mm
- Outlet height (from above the floor): 90 mm
- Distance between spray heads: 170 mm
- Water pattern coverage: at the height of 1520 mm above floor, the water pattern covers a circular area of at least 510 mm in diameter

★ Notes: the inlet part and outlet part are customizable;
shutoff valve and filter are proposed to be equipped on the water-supply end.



WJH0958B

复合式紧急冲淋洗眼器

- 材质: SS304
- 表面处理: 拉丝工艺
- 使用功能: 喷淋 + 洗眼 (可同时使用, 也可分开使用)
- 开关球阀: 两片式快开球阀
- 喷淋喷头: 旋压式卷边工艺设计, 直径 250mm
- 管道直径: 38mm
- 公称压力: 1.0Mpa
- 工作压力: 0.2 ~ 0.4Mpa
- 测试压力: 1.5Mpa
- 使用环境温度: 0°C ~ 40°C
- 喷淋水流量: $\geq 76\text{L/min}$
- 洗脸 / 洗眼水流量: $\geq 11.4\text{L/min}$
- 洗眼盆: 300mm 直边设计, 聚水集中, 防止飞溅
- 防尘盖: 主体一体式设计, 不易丢失
- 喷头特点: 专利设计, 自带双流量调节阀
- 进水口尺寸: 1" 英制内螺纹
- 排水口尺寸: 1" 英制内螺纹
- 进水口高度: 1570mm
- 排水口高度: 90mm
- 洗眼喷头间距: 170mm
- 出水范围: 距站立面 1520mm 高度, 出水范围直径至少为 510mm

★备注: 进、排水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器。
可添加不锈钢脚踏板, 控制洗眼开关。

COMBINED EMERGENCY SHOWER & EYE WASH

- Material: Stainless Steel 304
- Surface finishing: sanded
- Usage: drenching body and rinsing faces / eyes can be operated separately or simultaneously
- Shower & eye wash switch: two-piece ball valve
- Shower head: spinning-formed with curled rim, diameter 250 mm
- Pipe diameter: 38 mm
- Nominal pressure: 1.0 Mpa
- Working pressure: 0.2~0.4 Mpa
- Testing pressure: 1.5 Mpa
- Temperature requirement on working environment: 0°C~40°C
- Flow rate of body shower: $\geq 76\text{L/min}$
- Flow rate of eye/face wash: $\geq 11.4\text{L/min}$
- Eyewash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Dust cover: integrated with the spray head (not connected by chain), and easily removed by water flow.
- Spray head feature: patented design, each spray head equips with one water-flow control valve
- Inlet thread: Rp 1", female
- Outlet thread: Rp 1", female
- Inlet height (from above the floor): 1570 mm
- Outlet height (from above the floor): 90 mm
- Distance between spray heads: 170 mm
- Water pattern coverage: at the height of 1520 mm above floor, the water pattern covers a circular area of at least 510 mm in diameter

★ Notes: the inlet part and outlet part are customizable;
shutoff valve and filter are proposed to be equipped on the water-supply end;
stainless steel - made foot treadle is optional as eye wash switch



WJH1358

复合式紧急冲淋洗眼器

- 材质: SS316
- 表面处理: 拉丝工艺
- 使用功能: 喷淋 + 洗眼 (可同时使用, 也可分开使用)
- 开关球阀: 两片式快开球阀
- 喷淋喷头: 旋压式卷边工艺设计, 直径 250mm
- 管道直径: 42mm
- 公称压力: 1.0Mpa
- 工作压力: 0.2 ~ 0.4Mpa
- 测试压力: 1.5Mpa
- 使用环境温度: 0°C ~ 40°C
- 喷淋水流量: $\geq 76\text{L/min}$
- 洗脸 / 洗眼水流量: $\geq 11.4\text{L/min}$
- 洗眼盆: 300mm 直边设计, 聚水集中, 防止飞溅
- 不锈钢防尘盖: 盖体一体式开关设计, 有效隔离粉尘
- 洗眼喷头: 专利设计, 自带双流量调节阀
- 进水口尺寸: 1" 英制内螺纹
- 排水口尺寸: 1-1/4" 英制内螺纹
- 进水口高度: 1540mm
- 排水口高度: 100mm
- 洗眼喷头间距: 170mm
- 出水范围: 距站立面 1520mm 高度, 出水范围直径至少为 510mm

★备注: 进、排水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器。



SS316




WJH1109

COMBINED EMERGENCY SHOWER & EYE WASH

- Material: Stainless Steel 316
- Surface finishing: sanded
- Assembling feature: pipes connected by innovative inserting & turning
- Usage: drenching body and rinsing faces / eyes can be operated separately or simultaneously
- Shower & eye wash switch: two-piece ball valve
- Shower head: spinning-formed with curled rim, diameter 250 mm
- Pipe diameter: 42 mm
- Nominal pressure: 1.0 Mpa
- Working pressure: 0.2~0.4 Mpa
- Testing pressure: 1.5 Mpa
- Temperature requirement on working environment: 0°C~40°C
- Flow rate of body shower: $\geq 76\text{L/min}$
- Flow rate of eye/face wash: $\geq 11.4\text{L/min}$
- Eyewash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Dust cover: integrated with the spray head (not connected by chain) and easily removed by water flow.
- Spray head feature: patented design, each spray head equips with one water-flow control valve
- Inlet thread: Rc 1", female
- Outlet thread: Rc 1-1/4", female
- Inlet height (from above the floor): 1540 mm
- Outlet height (from above the floor): 100 mm
- Distance between spray heads: 170 mm
- Water pattern coverage: at the height of 1520 mm above floor, the water pattern covers a circular area of at least 510 mm in diameter


★ Notes: the inlet part and outlet part are customizable;
shutoff valve and filter are proposed to be equipped on the water-supply end

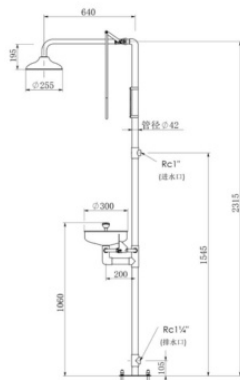

复合式紧急冲淋洗眼器

- 材质: SS304
- 表面处理: 高亮度环氧树脂涂层
- 使用功能: 喷淋 (可选配单口洗眼器)
- 开关球阀: 两片式快开球阀
- 喷淋喷头: 旋压式卷边工艺设计, 直径 250mm
- 管道直径: 38mm
- 公称压力: 1.0Mpa
- 工作压力: 0.2 ~ 0.4Mpa
- 测试压力: 1.5Mpa
- 使用环境温度: 0°C ~ 40°C
- 喷淋水流量: $\geq 76\text{L/min}$
- 进水口尺寸: 1" 英制内螺纹
- 进水口高度: 1190mm
- 出水范围: 距站立面 1520mm 高度, 出水范围直径至少为 510mm


★备注: 进水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器。

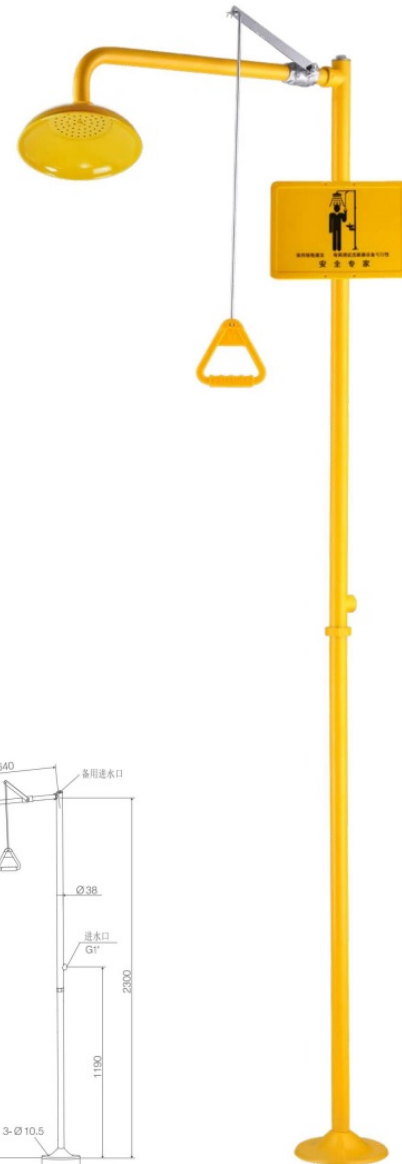

COMBINED EMERGENCY SHOWER & EYE WASH

- Material: Stainless Steel 304
- Surface finishing: glossy epoxy coated
- Usage: shower (optional hand-held eye wash)
- Shower & eye wash switch: two-piece ball valve
- Shower head: spinning-formed with curled rim, diameter 250 mm
- Pipe diameter: 38 mm
- Nominal pressure: 1.0 Mpa
- Working pressure: 0.2~0.4 Mpa
- Testing pressure: 1.5 Mpa
- Temperature requirement on working environment: 0°C~40°C
- Flow rate of body shower: $\geq 76\text{L/min}$
- Inlet thread: G 1"
- Inlet height (from above the floor): 1190 mm
- Water pattern coverage: at the height of 1520 mm above floor, the water pattern covers a circular area of at least 510 mm in diameter

★ Notes: the inlet parts and outlet parts are customizable;
shutoff valve and filter are proposed to be equipped on the water-supply end

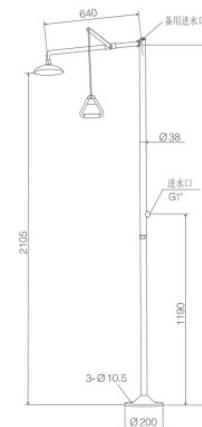


WJH0458C

复合式紧急冲淋洗眼器

- 材质: SS304
- 产品特点: 防护栏、大尺寸集水槽 (可选配喷淋水幕帘)
- 表面处理: 精细抛光 增强产品耐腐蚀能力
- 使用功能: 喷淋 + 洗眼 (可同时使用, 也可分开使用)
- 开关球阀: 两片式快开球阀
- 喷淋喷头: 旋压式卷边工艺设计, 直径 250mm
- 管道直径: 38mm
- 公称压力: 1.0Mpa
- 工作压力: 0.2 ~ 0.4Mpa
- 测试压力: 1.5Mpa
- 使用环境温度: 0°C ~ 40°C
- 喷淋水流量: $\geq 76\text{L/min}$
- 洗脸 / 洗眼水流量: $\geq 11.4\text{L/min}$
- 洗脸盆: 300mm 直边设计, 聚水集中, 防止飞溅
- 防尘盖: 主体一体式设计, 不易丢失
- 洗眼喷头特点: 专利设计, 自带双流量调节阀
- 进水口尺寸: 1" 英制内螺纹
- 排水口尺寸: 1" 英制内螺纹
- 进水口高度: 1305mm
- 排水口高度: 206mm
- 洗眼喷头间距: 170mm
- 集水槽尺寸: 长 × 宽 × 高 = 1000 × 1000 × 120mm

★备注 1: 进、排水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器。

★备注 2: 此款产品为定制款, 可依据用户现场环境需求, 定制集水槽尺寸和规格。

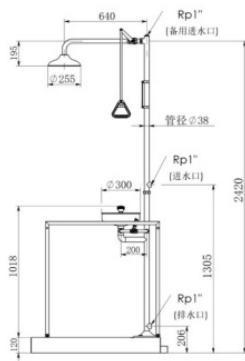



WJH1590

COMBINED EMERGENCY SHOWER & EYE WASH

- Material: Stainless Steel 304
- Product features: equips with foot treadle, guard rail, waste-water collecting sink (optional curtain)
- Surface finishing: fine-polished, which makes the pipe surface performs better on corrosion resistance
- Usage: drenching body and rinsing faces / eyes can be operated separately or simultaneously
- Shower & eye wash switch: two-piece ball valve
- Shower head: spinning-formed with curled rim, diameter 250 mm
- Pipe diameter: 38 mm
- Nominal pressure: 1.0 Mpa
- Working pressure: 0.2~0.4 Mpa
- Temperature requirement on working environment: 0°C~40°C
- Flow rate of body shower: $\geq 76\text{L/min}$
- Flow rate of eye/face wash: $\geq 11.4\text{L/min}$
- Flow rate of eye wash: $\geq 1.5\text{L/min}$
- Eyewash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Dust cover feature: integrated with the spray head (not connected by chain)
- Spray head feature: patented design, each spray head equips with one water-flow control valve
- Inlet thread: Rp 1", female
- Outlet thread: Rp 1", female
- Inlet height (from above the floor): 1305 mm
- Outlet height (from above the floor): 206 mm
- Distance between spray heads: 170 mm
- Size of waste-water collecting sink: 1000 mm (length) X 1000 mm (width) X 100 mm (depth)

★ Notes: 1, the inlet parts and outlet parts are customizable; shutoff valve and filter are proposed to be equipped on the water-supply end

2, the shower, as well as the waste-water collecting sink are customizable

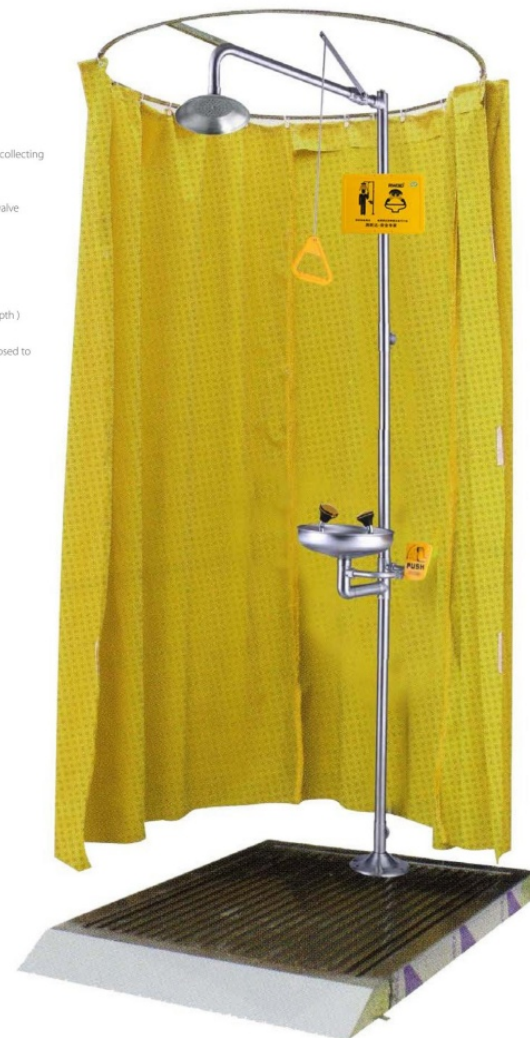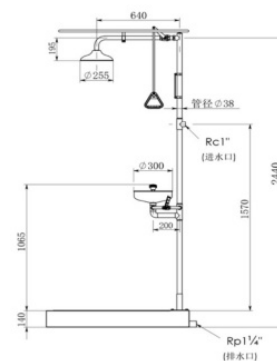

WJH1591

防冻型紧急冲淋洗眼器

- 材质: SS304
- 表面处理: 精细抛光 增强产品耐腐蚀能力
- 安装特点: 采用“由任式”管道连接方式, 能够快速的装配和拆卸
- 使用功能: 喷淋 + 洗眼 + 手动排空
- 适宜地区: 北方低寒地区
- 开关球阀: 两片式快开球阀 + 三片式特制球阀
- 冲淋喷头: 旋压式卷边工艺设计, 直径 250mm
- 管道直径: 38mm
- 洗眼盆: 300mm 直边设计, 聚水集中, 防止飞溅
- 防尘盖: 主体一体式设计, 不易丢失
- 洗眼喷头特点: 专利设计, 自带双流量调节阀
- 进水口尺寸: 1" 英制外螺纹
- 排水口尺寸: 1" 英制内螺纹
- 进水口高度: 810mm
- 排水口高度: 80mm

● 产品特点:

1. 采用新型专利洗眼喷头。洗眼器喷头的出水流量, 由喷头内部的流量调节结构控制, 出厂前已经调试防止, 若使用现场水源工作压力有所变动, 可以自行调节。
2. 进水总阀为特制三通球阀。进水口打开 (将三通球阀控制把手向下按压低于水平面 45° 开启), 排空口关闭; 向上扳回三通球阀控制把手 (高于水平面 45°), 进水口关闭, 排空口开启, 管路中的积水自动排空。
3. 洗眼器管路设有渗水孔。以排空洗眼喷头内残留的积水, 利于管路的清洁卫生和防冻 (洗眼时一部分水由此孔排入下水管, 不影响使用效果。)
4. 本洗眼器具有手动排空功能, 具有防冻作用, 适用气温低于 0℃ 地区和热供水的环境使用。


★备注: 进、排水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器。

ANTI-FREEZING EMERGENCY SHOWER & EYE WASH

- Material: SS304
- Surface finishing: fine-polished, which makes the pipe surface performs better on corrosion resistance
- Installation characteristics: the "Union" allows easier pipe connection and disconnection
- Usage: Shower+Eye wash+Manual emptying
- Appropriate area: Low cold areas in the North
- Shower & eye wash switch: specially designed ball valve
- Shower head: spinning-formed with curled rim, diameter 250 mm
- Pipe diameter: 38mm
- Eyewash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Dust cover: integrated with the spray head (not connected by chain)
- Spray head feature: patented design, each spray head equips with one water-flow control valve
- Inlet thread: G1", male
- Outlet thread: Rp 1", female
- Inlet height: 810mm
- Outlet height: 86mm
- Product features:

1. Adopt the new patented eye wash spray head. The outlet water flow of the eye wash spray head is controlled by the flow regulation structure inside the spray head. It has been debugged and corrected before leaving the factory. If the water pressure on site changes, it can be adjusted by itself.
2. The main water inlet valve is a special three-way ball valve. Open the water inlet (press the three-way ball valve control handle down to 45° below the level to open), and close the drain port. Turn the three-way ball valve control handle upwards (higher than 45° above the level), the water inlet is closed, the drainage port is opened, and the water in the pipeline is automatically drained.
3. The pipeline is equipped with a water leakage hole to empty the residual water in the eye nozzle, which is conducive to the cleaning and anti-freezing of the pipeline (a part of the water is drained into the sewer pipe during eye washing without affecting the use effect).
4. The eye wash has the function of manual emptying and anti-freezing. It is suitable for use in areas where the temperature is below 0°C and in environments with hot water supply.

★ Notes: The inlet part and outlet part are customizable. Shut off valve and filter are proposed to be equipped on the water-supply end

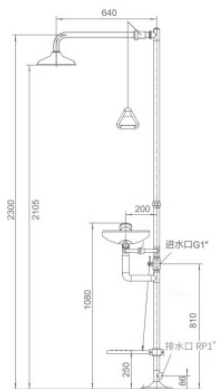

WJH1005

冷热水洗眼器


- 材质: SS304
- 表面处理: 精细抛光
- 安装特点: 采用“由任式”管道连接方式, 能够快速的装配和拆卸
- 使用功能: 喷淋 + 洗眼 + 冷、热 (混合) 进水
- 适宜地区: 现场有热水源的工作场所
- 开关球阀: 两片式快开球阀 + 特制三通球阀
- 冲淋喷头: 旋压式卷边工艺设计, 直径 250mm
- 管道直径: 38mm
- 洗眼盆: 300mm 直边设计, 聚水集中, 防止飞溅
- 防尘盖: 主体一体式设计, 不易丢失
- 洗眼喷头特点: 专利设计, 自带双流量调节阀
- 冷、热进水口尺寸: 1" 英制内螺纹
- 排水口尺寸: 1" 英制内螺纹
- 冷、热进水口高度: 925mm
- 排水口高度: 90mm
- 洗眼喷头间距: 170mm
- 出水范围: 距站立面 1520mm 高度, 出水范围直径至少为 510mm

★备注: 冷、热进水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器。

HOT AND COLD WATER EYE WASH

- Material: SS304
- Surface finishing: fine-polished
- Installation characteristics: the "Union" allows easier pipe connection and disconnection
- Usage: Shower+Eye wash+Cold and hot (mixed) water
- Appropriate area: a workplace with hot water on site
- Shower & eye wash switch: specially designed ball valve
- Shower head: spinning-formed with curled rim, diameter 250 mm
- Pipe diameter: 38mm
- Eyewash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Dust cover: integrated with the spray head (not connected by chain)
- Spray head feature: patented design, each spray head equips with one water-flow control valve
- Inlet thread: Rp 1", female
- Outlet thread: Rp 1", female
- Inlet height: 925mm
- Outlet height: 90mm
- Distance between spray heads: 170 mm
- Water pattern coverage: at the height of 1520 mm above floor, the water pattern covers a circular area of at least 510 mm in diameter

★ Notes: The inlet part and outlet part are customizable. Shut off valve and filter are proposed to be equipped on the water-supply end

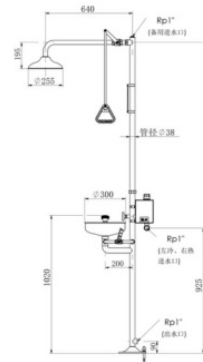

恒温定制款

防冻型紧急冲淋洗眼器


- 材质：SS304
- 表面处理：精细抛光 + 高亮度环氧树脂涂层
- 安装特点：采用“由任式”管道连接方式，能够快速的装配和拆卸
- 使用功能：喷淋 + 洗眼 + 手动排空
- 适宜地区：北方低寒地区
- 开关球阀：两片式快开球阀 + 特制三通球阀
- 喷淋喷头：旋压式卷边工艺设计，直径 250mm
- 管道直径：48mm
- 洗眼盆：300mm 直边设计，聚水集中，防止飞溅
- 防尘盖：主体一体式设计，不易丢失
- 洗眼喷头特点：专利设计，自带双流量调节阀
- 进水口尺寸：1" 英制内螺纹
- 排水口尺寸：1" 英制外螺纹
- 进水口高度：110mm
- 排水口高度：50mm
- 洗眼喷头间距：170mm
- 出水范围：距立面 1520mm 高度，出水范围直径至少为 510mm

★备注：进、排水口尺寸可按用户需求定制，建议进水口设置维修应急阀门和过滤器。

ANTI-FREEZING EMERGENCY SHOWER & EYE WASH

- Material: SS304
- Surface finishing: fine-polished, glossy epoxy coated
- Features: the "Union" allows easier pipe connection and disconnection
- Usage: Shower+Eyewash+Manual emptying
- Appropriate area: Low cold areas in the North
- Shower & eye wash switch: specially designed ball valve
- Shower head: spinning-formed with curled rim, diameter 250 mm
- Pipe diameter: 48mm
- Eyewash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Dust cover: integrated with the spray head (not connected by chain)
- Spray head feature: patented design, each spray head equips with one water-flow control valve
- Inlet thread: Rp 1", female
- Outlet thread: G 1", male
- Inlet height: 110mm
- Outlet height: 50mm
- Distance between spray head: 170mm
- Water pattern coverage: at the height of 1520 mm above floor, the water pattern must be at least 510 mm in diameter

★ Note: the inlet part and outlet part are customizable; shut off valve and filter are proposed to be equipped on the water-supply end



WJH0458A

防冻型紧急冲淋洗眼器


- 材质：SS304
- 表面处理：精细抛光 + 高亮度环氧树脂涂层
- 安装特点：采用“由任式”管道连接方式，能够快速的装配和拆卸
- 使用功能：喷淋 + 洗眼 + 脚踏自动排空
- 适宜地区：北方低寒地区
- 开关球阀：两片式快开球阀 + 特制三通球阀
- 喷淋喷头：旋压式卷边工艺设计，直径 250mm
- 管道直径：48mm
- 洗眼盆：300mm 直边设计，聚水集中，防止飞溅
- 防尘盖：主体一体式设计，不易丢失
- 洗眼喷头特点：专利设计，自带双流量调节阀
- 进水口尺寸：1" 英制内螺纹
- 排水口尺寸：1" 英制外螺纹
- 进水口高度：110mm
- 排水口高度：50mm
- 洗眼喷头间距：170mm

★备注 1：进、排水口尺寸可按用户需求定制，建议进水口设置维修应急阀门和过滤器。
★备注 2：本洗眼器为全自动排空洗眼器，操作方法：①人站在洗眼器脚踏板上，推开手推板，向下拉动拉杆 90°，洗眼器自动出水。②使用完毕，手推板、防尘盖和拉杆复位。③人离开脚踏板，出水阀自动关闭，同时可以直接排空整个洗眼系统管路里面的积水，防止结冰，保障洗眼器在结冰天气的正常使用。无需再做二次排空阀门的动作，方便快捷。

ANTI-FREEZING EMERGENCY SHOWER & EYE WASH

- Material: SS304
- Surface finishing: glossy epoxy coated
- Features: the "Union" allows easier pipe connection and disconnection
- Usage: Shower+Eyewash+Foot automatically emptying
- Appropriate area: Low cold areas in the North
- Shower & eye wash switch: specially designed ball valve
- Shower head: spinning-formed with curled rim, diameter 250 mm
- Pipe diameter: 48mm
- Eyewash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Dust cover: integrated with the spray head (not connected by chain)
- Spray head feature: patented design, each spray head equips with one water-flow control valve
- Inlet thread: Rp 1", female
- Outlet thread: G 1", male
- Inlet height: 110mm
- Outlet height: 50mm
- Distance between spray head: 170mm

★ Notes:
1.The inlet part and outlet part are customizable; shut off valve and filter are proposed to be equipped on the water-supply end;
2.This eye wash is an automatic emptying method of operation:
① The person stands on the foot pedal of the eye wash, pushes away the hand push board, and pulls the lever downward 90°, the eye wash automatically gives water.
② After use, hand push board, dust cover and pull rod are reset.
③ When the person leaves the foot pedal, the outlet valve closes automatically, at the same time it can directly empty the accumulated water in the entire eyewash system pipeline to prevent freezing and ensure the normal use of the eyewash in freezing weather. No need to do the second emptying valve action, convenient and fast.



WJH0458 (可加防尘盖)

电伴热复合式冲淋洗眼器


- 内材质: SS304
- 外材质: ABS 可拆卸外壳
- 安装特点: 具有保温防冻作用, 配有自限温电热带及温控系统
- 使用功能: 喷淋 + 洗眼 (可同时使用, 也可分开使用)
- 防爆等级: Ex db II BT4 / Ex db II BT6 / Ex db II CT4 / Ex db II CT6 (可根据客户要求定制)
- 防护等级: IP65 / IP66 (可定制)
- 开关球阀: 常规两片式球阀 (三片式球阀可定制)
- 洗眼盆: 300mm 直边设计, 聚水集中
- 公称压力: 1.0Mpa
- 工作压力: 0.2 - 0.4Mpa
- 测试压力: 1.5Mpa
- 喷淋水流量: $\geq 76\text{L/MIN}$
- 洗脸 / 洗眼水流量: $\geq 11.4\text{L/MIN}$
- 进水口尺寸: 1" 英制内螺纹 / 1" 英制外螺纹
- 排水口尺寸: 1" 英制外螺纹
- 进水口高度: 1230mm
- 排水口高度: 100mm

★备注: 建议进、排水口设置维修急阀门和过滤器, 可根据现场使用环境定制防爆防护等级

★选配: 声光报警器, 防爆照明灯, 脚踏装置

产品特点

1. 电伴热复合式冲淋洗眼器, 专为北方寒冷天气而设计。
2. 一旦有使用者开动洗眼器, 则声光报警将会启动工作, 不仅可以告知其他人此处有人在操作, 同时也达到请求援助的目的。
3. 使用过的水将由面盆的内漏水管道直接排走, 不污染使用空间, 简单方便。

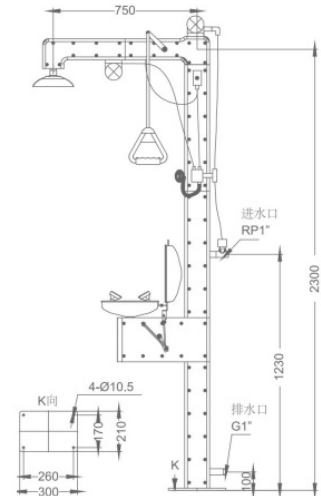

WJH0658 (机械款)

ELECTRICAL HEAT TRACING COMBINATION SHOWER & EYE WASH

- Internal Material: SS304
- External Material: ABS Removable Shell
- Installation characteristic: With heat preservation and anti-freezing function, equipped with constant thermostatic heating cable and temperature control system
- Usage: drenching body and rinsing faces / eyes can be operated separately or simultaneously
- Explosive-proof grade: Ex db II BT4 / Ex db II BT6 / Ex db II CT4 / Ex db II CT6 (Customizable)
- Protection grade: IP65 / IP66 (Customizable)
- Shower & eye wash switch: specially designed ball valve
- Eyewash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Nominal pressure: 1.0Mpa
- Working pressure: 0.2-0.4 Mpa
- Testing pressure: 1.5 Mpa
- Flow rate of body shower: $\geq 76\text{L/min}$
- Flow rate of eye/face wash: $\geq 11.4\text{L/min}$
- Inlet thread: Rp 1", female
- Outlet thread: G 1", male
- Inlet height: 1230mm
- Outlet height: 100mm

★ Notes: The inlet part and outlet part are customizable shut off valve and filter are proposed to be equipped on the water supply end. Explosion-proof protection grade can be customized according to the site environment

★ Optional: Sound and light alarm, explosion-proof lamp, pedal device, dust proof device

Product Feature:

1. Electrical heat tracing combination shower & eye wash, specially designed for cold weather in northern. The inlet is equipped with a flow alarm valve.
2. Once a user operate the eye wash, the audible and visual alarm will start to work, not only to inform others that someone is operating here, but also to request assistance.
3. The used water will be drained directly from the inner leaking pipe of the bowl, which will not pollute the use space and is simple and convenient.



WJH0658 (数显款)

电伴热复合式冲淋洗眼器


- 内材质: SS304
- 外材质: ABS 可拆卸外壳 / 304 不锈钢外壳
- 安装特点: 具有保温防冻作用, 配有自限温电伴热带及温控系统
- 使用功能: 喷淋 + 洗眼 (可同时使用, 也可分开使用)
- 防爆等级: Ex db II BT4 / Ex db II BT6 / Ex db II CT4 / Ex db II CT6 (可根据客户要求定制)
- 防护等级: IP65 / IP66 (可定制)
- 开关球阀: 常规两片式球阀 (三片式球阀可定制)
- 洗脸盆: 300mm 直边设计, 聚水集中
- 公称压力: 1.0Mpa
- 工作压力: 0.2 ~ 0.4Mpa
- 测试压力: 1.5Mpa
- 喷淋水流量: $\geq 76\text{L}/\text{MIN}$
- 洗脸 / 洗眼水流量: $\geq 11.4\text{L}/\text{MIN}$
- 进水口尺寸: 1" 英制内螺纹
- 排水口尺寸: 1" 英制外螺纹
- 进水口高度: 1230mm
- 排水口高度: 100mm

★备注: 建议进、排水口设置维修应急阀门和过滤器, 可根据现场使用环境定制防爆防护等级

★选配: 声光报警器, 防爆照明灯, 脚踏装置, 防尘装置

★产品特点

1. 电伴热复合式冲淋洗眼器, 专为北方寒冷天气而设计。进水口处装有流量报警阀。
2. 一旦有使用者开动洗眼器, 则声光报警将会启动工作, 不仅可以告知其他人此处有人在操作, 同时也达到请求援助的目的。
3. 使用过的水将由面盆的内漏水管道直接排走, 不污染使用空间, 简单方便。

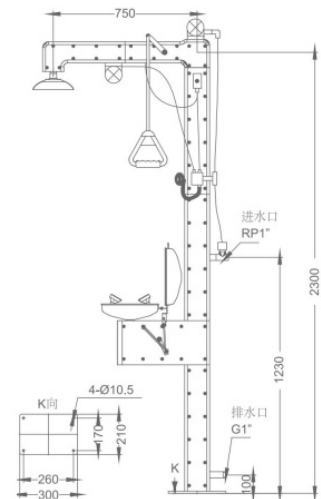

WJH0658-Q

ELECTRICAL HEAT TRACING COMBINATION SHOWER & EYE WASH

- Internal Material: SS304
- External Material: ABS Detachable Shell / 304 Stainless Steel Shell
- Installation characteristic: With heat preservation and anti-freezing function, equipped with constant thermostatic heating cable and temperature control system
- Usage: drenching body and rinsing faces / eyes can be operated separately or simultaneously
- Explosive-proof grade: Ex db II BT4 / Ex db II BT6 / Ex db II CT4 / Ex db II CT6 (Customizable)
- Protection grade: IP65 / IP66 (Customizable)
- Shower & eye wash switch: specially designed ball valve
- Eyewash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Nominal pressure: 1.0Mpa
- Working pressure: 0.2-0.4 Mpa
- Testing pressure: 1.5 Mpa
- Flow rate of body shower: $\geq 76\text{L}/\text{min}$
- Flow rate of eye/face wash: $\geq 11.4\text{L}/\text{min}$
- Inlet thread: Rp 1", female
- Outlet thread: G 1", male
- Inlet height: 1230mm
- Outlet height: 100mm
- Water temperature of pipeline: 15°C~ 30°C

★ Notes: The inlet part and outlet part are customizable. shut off valve and filter are proposed to be equipped on the water supply end.

★ Optional: Sound and light alarm, explosion-proof lamp, pedal device, dust proof device

★ Product Feature:

1. Electrical heat tracing combination shower & eye wash, specially designed for cold weather in northern. The inlet is equipped with a flow alarm valve.
2. Once a user operate the eye wash, the audible and visual alarm will start to work, not only to inform others that someone is operating here, but also to request assistance.
3. The used water will be drained directly from the inner leaking pipe of the bowl, which will not pollute the use space and is simple and convenient.



WJH0658-S



电加热复合式紧急冲淋洗眼器

- 内材质: SS304
- 外材质: ABS 可拆卸外壳
- 安装特点: 具有保温防冻作用, 配有自限温电伴热带及温控系统
- 使用功能: 喷淋 + 洗眼 (可同时使用, 也可分开使用)
- 防爆等级: Ex db I BT4 / Ex db II BT6 / Ex db II CT4 / Ex db II CT6 (可根据客户要求定制)
- 防护等级: IP65 / IP66 (可定制)
- 开关球阀: 常规两片式球阀 (三片式球阀可定制)
- 洗脸盆: 300mm 直边设计, 聚水集中
- 公称压力: 1.0Mpa
- 工作压力: 0.2 - 0.4Mpa
- 测试压力: 1.5Mpa
- 喷淋水流量: $\geq 76\text{L/MIN}$
- 洗脸 / 洗眼水流量: $\geq 11.4\text{L/MIN}$
- 进水口尺寸: 1-1/4" 法兰
- 排水口尺寸: 1" 法兰
- 进水口高度: 170mm
- 排水口高度: 100mm

★产品特色:

- ①本品适用于 0℃ 以下环境地区使用。当水温低于 0℃ 时, 洗眼器管身将自动开启加热功能, 解除因温度过低无法使用或因此而造成的损坏的可能。
- ②进水口处装有流量报警阀, 在产品顶部配有防爆型声光报警器。一旦有使用者开启洗眼器, 则声光报警器就会启动工作, 不仅可以告知其他人此处有人在操作, 同时也达到请求援助的目的。
- ③在洗眼器喷头端口处加装了防爆智能照明装置, 采用光控开关装置, 在有效的节约了电能的情况下, 方便受伤者在夜间使用。
- ④本品配有聚氨酯保温隔热材料进行保温防护, 避免了因外界环境温度的变化而影响了洗眼器管道水温变化, 更有效的保证了受伤者得到适宜的洗眼水温。
- ⑤洗眼器水源采用集中防爆加热系统集中放热, 防爆加热系统具有防干烧、防漏电 (漏电时自动切断电源) 和可靠温控功能, 能有效的瞬时提高洗眼器水温 15℃ 且不高高于 38℃。
- ⑥洗眼器具有自动排空装置, 洗眼系统内积水能在 15 秒全部排空, 更有效的提高了洗眼系统的防冻功能已确保洗眼用水洁净卫生。

★备注: 进、排水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器。

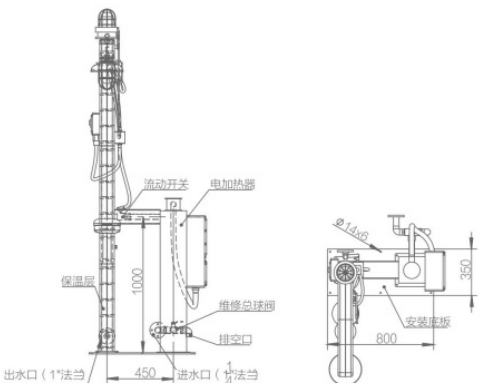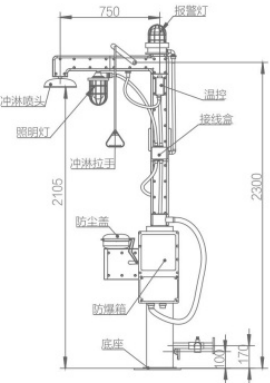

ELECTRICAL HEAT TRACING COMBINATION SHOWER & EYE WASH

- Internal Material: SS304
- External Material: ABS Detachable Shell
- Installation characteristic: With heat preservation and anti-freezing function, equipped with constant thermostatic heating cable and temperature control system
- Usage: drenching body and rinsing faces / eyes can be operated separately or simultaneously
- Explosive-proof grade: Ex db I BT4 / Ex db II BT6 / Ex db II CT4 / Ex db II CT6 (Customizable)
- Protection grade: IP65 / IP66 (Customizable)
- Shower & eye wash switch: two-piece ball valve
- Eyewash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Nominal pressure: 1.0Mpa
- Working pressure: 0.2-0.4 Mpa
- Testing pressure: 1.5 Mpa
- Flow rate of body shower: $\geq 76\text{L/min}$
- Flow rate of eye/face wash: $\geq 11.4\text{L/min}$
- Inlet thread: DN32
- Outlet thread: DN25
- Inlet height: 170mm
- Outlet height: 100mm

★ Product Feature:

- ① This product is suitable for use in areas that the temperature below 0°C. When the water temperature is lower than 0°C, the tube body of the eye wash will automatically turn on the heating function to remove the possibility that the temperature is too low to use or the damage.
- ② The water inlet is equipped with a flow alarm valve and an explosion-proof audible and visual alarm is equipped at the top of the product.
- ③ An explosion-proof intelligent lighting device is installed at the nozzle end of the eye wash and use light control switch device in the case of effectively saving electricity, it is convenient for the injured to use at night.
- ④ This product is equipped with polyurethane thermal insulation material for thermal protection, to avoid the influence of external ambient temperature changes on the water temperature of the eyewash pipe, more effective to ensure that the injured get appropriate water to wash their eyes.
- ⑤ The water source of the eye wash uses a centralized explosion-proof heating system to radiate heat, the explosion-proof heating system has anti-dry burning, anti-leakage (automatically cut off the power when leakage) and reliable temperature control function, it can effectively increase the water temperature of eyewash 15°C and not higher than 38°C instantly.
- ⑥ The eye wash with automatic emptying device, the water in the eye wash system can be emptied in 15 seconds, more effectively improve the anti-freeze function of the eye washing system to ensure the clean water sanitation.

★ Notes: The inlet part and outlet part are customizable. Shut off valve and filter are proposed to be equipped on the water supply end.



紧急冲淋洗眼房

- 材质：板材、框架 SS304
- 使用功能：喷淋 + 洗眼（可同时使用，也可分开使用）
- 安装特点：双层加厚不锈钢板，内置 5cm 厚玻璃棉
- 玻璃棉特点：耐火、阻燃、保温，隔热御寒
- 观察窗：采用双层钢化玻璃，尺寸 50cmx50cm，已做抽真空处理。
- 洗眼房尺寸：长 × 宽 × 高 = 110cmx110cmx240cm
- 开关球阀：两片式快开球阀
- 洗眼盆：300mm 直边设计，聚水集中，防止飞溅。
- 公称压力：1.0Mpa
- 工作压力：0.2 - 0.4Mpa
- 测试压力：1.5Mpa
- 喷淋水流量：≥ 76 L/min
- 洗眼 / 洗脸水流量：≥ 11.4 L/min
- 进水管尺寸：1" 英制内螺纹
- 排水口尺寸：1-1/4" 英制外螺纹
- 防尘盖：主体一体式设计，不易丢失
- 洗眼喷头特点：专利设计，自带双流量调节阀
- 适用场所：广泛应用于无尘车间、石油、化工、医药、消防、电力和港口等场所。
- ★ 产品特点：①洗眼房内设有集水槽，②洗眼器管路设有渗水孔，以排空洗眼喷头内残留的积水，利于管道的清洁卫生和防冻（洗眼时一部分水由此孔排入下水管，不影响使用效果）。③喷淋旁进、排水孔安装位已预留空隙，用于电伴热带的缠绕安装，实现管线的保温，可满足严寒地区使用

★备注：洗眼房尺寸规格可按现场需求定制。进、排水口尺寸可按用户需求定制，建议进、排水口设置维修应急阀门和过滤器。

EMERGENCY SHOWER & EYE WASH ROOM

- Main material: SS304
- Usage: drenching body and rinsing faces / eyes can be operated separately or simultaneously
- Installation features: double thick stainless steel plate, built-in 5cm thick glass wool
- Glass wool characteristics: fire resistance, flame retardant, heat preservation, heat insulation and cold protection
- Inspection window: Double-layer tempered glass, size 50cmx50cm, the space between the window glass layers is vacuumized
- Eye wash room size: L x W x H = 110cmx110cmx240cm
- Shower & eye wash switch: two-piece ball valve
- Eye wash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Nominal pressure: 1.0Mpa
- Working pressure: 0.2-0.4Mpa
- Testing pressure: 1.5Mpa
- Flow rate of body shower: ≥76 L/min
- Flow rate of eye/face wash: ≥11.4 L/min
- Inlet thread: Rp 1", female
- Outlet thread: G 1-1/4", male
- Dust cover: integrated with the spray head
- Spray head feature: patented design, each spray head equips with one water-flow control valve
- Applicable places: Widely used in dust-free workshops, petroleum, chemical, pharmaceutical, fire protection, power and port and other places.

- Product features:
 - ① There is a waste-water collection sink in the eye wash room.
 - ② The eye wash pipeline is provided with a seepage hole to empty the residual water in the eye wash, which is conducive to the cleaning and anti-freezing of the pipeline (part of the water is discharged into the downpipe through the hole during the eye wash without affecting the effect of use).
 - ③ The installation position of the inlet and outlet holes of the shower room has reserved the gap, which is used for the winding installation of the electric tracing tropics, to realize the heat preservation of the pipelines, which can be used in the cold region

★ Notes: the size and specification of eye wash room can be customized according to the requirements of the site; the inlet part and outlet part are customizable; shutoff valve and filter are proposed to be equipped on the water-supply end



WJH0786-1

新品
NEW

紧急冲淋洗眼房

- 材质：板材、框架 SS304
- 使用功能：喷淋 + 洗眼（可同时使用，也可分开使用）
- 洗眼房尺寸：长 × 宽 × 高 = 110cmx114cmx240cm
- 开关球阀：两片式快开球阀
- 洗眼盆：300mm 直边设计，聚水集中，防止飞溅。
- 进水管尺寸：1-1/4" 英制外螺纹
- 排水口尺寸：1-1/4" 英制外螺纹
- 防尘盖：主体一体式设计，不易丢失
- 洗眼喷头特点：专利设计，自带双流量调节阀

★备注：洗眼房尺寸规格可按现场需求定制。进、排水口尺寸可按用户需求定制，建议进、排水口设置维修应急阀门和过滤器。



WJH0786A


EMERGENCY SHOWER & EYE WASH ROOM

- Main material: SS304
- Usage: drenching body and rinsing faces / eyes can be operated separately or simultaneously
- Eye wash room size: L x W x H = 110cmx114cmx240cm
- Shower & eye wash switch: two-piece ball valve
- Eye wash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Inlet thread: G1-1/4", male
- Outlet thread: G1-1/4", male
- Dust cover: integrated with the spray head
- Spray head feature: patented design, each spray head equips with one water-flow control valve

★ Notes: the size and specification of eye wash room can be customized according to the requirements of the site; the inlet part and outlet part are customizable; shutoff valve and filter are proposed to be equipped on the water-supply end



WJH0786



紧急冲淋洗眼房

- 材质：房体 PE、喷淋洗眼设备 SS304
- 使用功能：喷淋 + 洗眼（可同时使用，也可分开使用）
- 洗眼房尺寸：长 × 宽 × 高 = 115cm × 130cm × 240cm
- 开关球阀：两片式快开球阀
- 洗眼盆：300mm 直边设计，聚水集中，防止飞溅
- 公称压力：1.0Mpa
- 工作压力：0.2 ~ 0.4Mpa
- 测试压力：1.5Mpa
- 喷淋水流量：≥ 76 L/min
- 洗眼 / 洗脸水流量：≥ 11.4 L/min
- 进水口尺寸：1" 英制外螺纹
- 防尘盖：主体一体式设计，不易丢失
- 洗眼喷头特点：专利设计，自带双流量调节阀
- 适用场所：广泛应用于无尘车间、石油、化工、医药、消防、电力和港口等场所

★备注：进水口尺寸可按用户需求定制，建议进水口设置维修应急阀门和过滤器。

EMERGENCY SHOWER & EYE WASH ROOM

- Material: Room PE, spraying eye washing equipment SS304
- Usage: drenching body and rinsing faces / eyes can be operated separately or simultaneously
- Eye wash room size: L × W × H = 115cm × 130cm × 240cm
- Shower & eye wash switch: two-piece ball valve
- Eye wash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Nominal pressure: 1.0Mpa
- Working pressure: 0.2~0.4Mpa
- Testing pressure: 1.5Mpa
- Flow rate of body shower: ≥76 L/min
- Flow rate of eye/face wash: ≥11.4 L/min
- Inlet thread: G 1", male
- Dust cover: integrated with the spray head
- Spray head feature: patented design, each spray head equips with one water-flow control valve
- Applicable places: Widely used in dust-free workshops, petroleum, chemical, pharmaceutical, fire protection, power and port and other places.

★ Notes: the inlet part and outlet part are customizable; shutoff valve and filter are proposed to be equipped on the water-supply end



WJH3501

紧急冲淋洗眼房

- 材质：板材、框架 SS304
- 使用功能：喷淋 + 洗眼（可同时使用，也可分开使用）
- 观察窗：双开门式可视玻璃窗
- 洗眼房尺寸：长 × 宽 × 高 = 110cm × 110cm × 295cm
- 开关球阀：两片式快开球阀
- 洗眼盆：300mm 直边设计，聚水集中，防止飞溅。
- 进水口尺寸：1" 英制内螺纹
- 排水口尺寸：1~1/4" 英制外螺纹
- 防尘盖：主体一体式设计，不易丢失
- 洗眼喷头特点：专利设计，自带双流量调节阀
- 适用场所：广泛应用于无尘车间、石油、化工、医药、消防、电力和港口等场所。

● 产品特点：①洗眼房内设集水槽。②洗眼器管路设有渗水孔，以排空洗眼喷头内残留的积水，利于管道的清洁卫生和防冻（洗眼时一部分水由此孔排入下水管，不影响使用效果）。③喷淋房进、排水孔安装位已预留空隙，用于电伴热带的缠绕安装，实现管线的保温，可满足严寒地区使用。④本产品顶部配有吊环，方便起吊。⑤可单独于墙壁指定角落。本产品自带方向轮，可根据现场需要随意移动，使用方便。

★备注：洗眼房尺寸规格可按现场需求定制。进、排水口尺寸可按用户需求定制，建议进水口设置维修应急阀门和过滤器。

EMERGENCY SHOWER & EYE WASH ROOM

- Main material: SS304
- Usage: drenching body and rinsing faces / eyes can be operated separately or simultaneously
- Inspection window: double door type visible glass window
- Eye wash room size: L × W × H = 110cm × 110cm × 295cm
- Shower & eye wash switch: two-piece ball valve
- Eye wash bowl features: 300 mm in diameter, vertical bowl-wall design, allows better water collecting and anti-splashing
- Inlet thread: Rp 1", female
- Outlet thread: G 1-1/4", male
- Dust cover: integrated with the spray head
- Spray head feature: patented design, each spray head equips with one water-flow control valve
- Applicable places: Widely used in dust-free workshops, petroleum, chemical, pharmaceutical, fire protection, power and port and other places.

- Product features:
 - ① There is a waste-water collection sink in the eye wash room.
 - ② The eye wash pipeline is provided with a seepage hole to empty the residual water in the eye wash, which is conducive to the cleaning and anti-freezing of the pipeline (part of the water is discharged into the downpipe through the hole during the eye wash without affecting the effect of use).
 - ③ The installation position of the inlet and outlet holes of the shower room has reserved the gap, which is used for the winding installation of the electric tracing tropics, to realize the heat preservation of the pipelines, which can be used in the cold region.
 - ④ The top of the product is equipped with a lifting ring for easy lifting.
 - ⑤ Can be alone in the wall designated corners. The product comes with universal wheel, which can be moved freely according to the needs of the site, convenient to use.

★ Notes: the size and specification of eye wash room can be customized according to the requirements of the site; the inlet part and outlet part are customizable; shutoff valve and filter are proposed to be equipped on the water-supply end



WJH1486-1

立式紧急洗眼器

- 材质: SS304
- 表面处理: 高亮度环氧树脂涂层
- 使用功能: 眼面部冲洗
- 开关球阀: 两片式快开球阀
- 管道直径: 38mm
- 公称压力: 1.0Mpa
- 工作压力: 0.2 ~ 0.4Mpa
- 测试压力: 1.5Mpa
- 使用环境温度: 0 ~ 40°C
- 洗眼 / 洗脸水流量: ≥ 11.4 L/min
- 洗眼盆: 300mm 直边设计, 聚水集中, 防止飞溅
- 防尘盖: 主体一体式设计, 不易丢失
- 进水口尺寸: 1/2" 英制外螺纹
- 排水口尺寸: 1" 英制内螺纹
- 进水口高度: 753mm
- 排水口高度: 86mm

★ 产品特色: 洗眼洗面停止使用后, 管道内积水自动排空, 达到防冻的目的。

★ 备注: 进、排水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器。

FLOOR-MOUNT EMERGENCY EYE WASH

- Materials: SS304
- Surface finishing: glossy epoxy coated
- Function: eye and face washing
- Eye wash switch: two-piece ball valve
- Pipe diameter: 38mm
- Nominal pressure: 1.0Mpa
- Working pressure: 0.2~0.4Mpa
- Test pressure: 1.5Mpa
- Working environment temperature: 0°C~40°C
- Eye wash/face wash water flow: ≥ 11.4 L/min
- Eye wash bowl: 300mm straight edge design, gather water, prevent splash
- Dust cover: integrated design of main body, not easy to lose
- Inner size: G 1/2", male
- Outlet size: Rp 1", female
- Inlet height: 753mm
- Outlet height: 86mm
- Product features: After the use of eye wash and face wash is stopped, the water in the pipeline will be drained automatically to achieve the purpose of anti-freezing.
- ★ Notes :The inlet part and outlet part are customizable; shut off valve and filter are proposed to be equipped on the water-supply end.

立式紧急洗眼器

- 材质: SS304
- 表面处理: 高亮度环氧树脂涂层
- 使用功能: 眼面部冲洗
- 开关球阀: 两片式快开球阀
- 管道直径: 38mm
- 公称压力: 1.0Mpa
- 工作压力: 0.2 ~ 0.4Mpa
- 测试压力: 1.5Mpa
- 使用环境温度: 0 ~ 40°C
- 洗眼 / 洗脸水流量: ≥ 11.4 L/min
- 洗眼盆: 300mm 直边设计, 聚水集中, 防止飞溅
- 防尘盖: 主体一体式设计, 不易丢失
- 进水口尺寸: 1/2" 英制外螺纹
- 排水口尺寸: 1" 英制内螺纹
- 进水口高度: 753mm
- 排水口高度: 86mm

★ 产品特色: 洗眼洗面停止使用后, 管道内积水自动排空, 达到防冻的目的。

★ 备注: 进、排水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器。

FLOOR-MOUNT EMERGENCY EYE WASH

- Materials: SS304
- Surface finishing: glossy epoxy coated
- Function: eye and face washing
- Eye wash switch: two-piece ball valve
- Pipe diameter: 38mm
- Nominal pressure: 1.0Mpa
- Working pressure: 0.2~0.4Mpa
- Test pressure: 1.5Mpa
- Working environment temperature: 0°C~40°C
- Eye wash/face wash water flow: ≥ 11.4 L/min
- Eye wash bowl: 300mm straight edge design, gather water, prevent splash
- Dust cover: integrated design of main body, not easy to lose
- Inner size: G 1/2", male
- Outlet size: Rp 1", female
- Inlet height: 753mm
- Outlet height: 86mm
- Product features: After the use of eye wash and face wash is stopped, the water in the pipeline will be drained automatically to achieve the purpose of anti-freezing.
- ★ Notes :The inlet part and outlet part are customizable; shut off valve and filter are proposed to be equipped on the water-supply end.



WJH0859 (黄色)

WJH0859 (黄色脚踏)



WJH0859 (红色)

WJH0859 (红色脚踏)

立式紧急洗眼器

- 材质：SS304
- 表面处理：精细抛光
- 使用功能：眼部面部冲洗
- 开关球阀：两片式球阀
- 不锈钢防尘盖：盖体一体式，有效隔离粉尘
- 管道直径：38mm
- 公称压力：1.0Mpa
- 工作压力：0.2 ~ 0.4Mpa
- 测试压力：1.5Mpa
- 使用环境温度：0 ~ 40℃
- 洗眼 / 洗脸水流量：≥ 11.4 L/min
- 洗眼盆：300mm 直边设计，聚水集中，防止飞溅
- 防尘盖：主体一体式设计不易丢失
- 进水口尺寸：3/4" 英制内螺纹
- 排水口尺寸：1" 英制内螺纹
- 进水口高度：1065mm
- 排水口高度：90mm

★ 产品特色：洗眼洗面停止使用后，管道内积水自动排空，达到防冻的目的。


★ 备注：进、排水口尺寸可按用户需求定制，建议进水口设置维修应急阀门和过滤器。

FLOOR-MOUNT EMERGENCY EYE WASH

- Materials: SS304
- Surface finishing: fine-polished
- Function: eye and face washing
- Eye wash switch: two-piece ball valve
- Stainless steel dust cover: integrated cover, effective dust isolation
- Pipe diameter: 38mm
- Nominal pressure: 1.0Mpa
- Working pressure: 0.2~0.4Mpa
- Test pressure: 1.5Mpa
- Working environment temperature: 0℃~40℃
- Eye wash/face wash water flow: ≥11.4 L/min
- Eye wash bowl: 300mm straight edge design, gather water, prevent splash
- Dust cover: integrated design of main body, not easy to lose
- Inner size: Rp 3/4", female
- Outlet size: Rp 1", female
- Inlet height: 1065mm
- Outlet height: 90mm

★ Product features: After the use of eye wash and face wash is stopped, the water in the pipeline will be drained automatically to achieve the purpose of anti-freezing.

★ Note: The inlet part and outlet part are customizable; shut-off valve and filter are proposed to be equipped on the water-supply end.

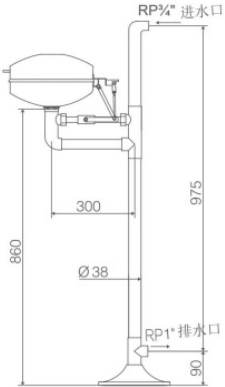


WJH0959B

立式紧急洗眼器

- 材质：SS304
- 表面处理：精细抛光
- 使用功能：眼部面部冲洗
- 开关球阀：两片式球阀
- 管道直径：38mm
- 公称压力：1.0Mpa
- 工作压力：0.2 ~ 0.4Mpa
- 测试压力：1.5Mpa
- 使用环境温度：0 ~ 40℃
- 洗眼 / 洗脸水流量：≥ 11.4 L/min
- 洗眼盆：300mm 直边设计，聚水集中，防止飞溅
- 防尘盖：主体一体式设计不易丢失
- 进水口尺寸：1/2" 英制外螺纹
- 排水口尺寸：1" 英制内螺纹
- 进水口高度：753mm
- 排水口高度：86mm

★ 产品特色：洗眼洗面停止使用后，管道内积水自动排空，达到防冻的目的。

★ 备注：进、排水口尺寸可按用户需求定制，建议进水口设置维修应急阀门和过滤器。可添加不锈钢脚踏板，控制洗眼开关。

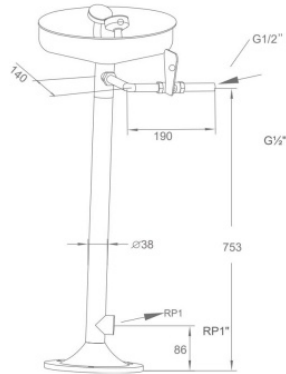

WJH0959

FLOOR-MOUNT EMERGENCY EYE WASH

- Materials: SS304
- Surface finishing: fine-polished
- Function: eye and face washing
- Eye wash switch: two-piece ball valve
- Pipe diameter: 38mm
- Nominal pressure: 1.0Mpa
- Working pressure: 0.2~0.4Mpa
- Test pressure: 1.5Mpa
- Working environment temperature: 0℃~40℃
- Eye wash/face wash water flow: ≥11.4 L/min
- Eye wash bowl: 300mm straight edge design, gather water, prevent splash
- Dust cover: integrated design of main body, not easy to lose
- Inner size: G 1/2", male
- Outlet size: Rp 1", female
- Inlet height: 753mm
- Outlet height: 86mm

● Product features: After the use of eye wash and face wash is stopped, the water in the pipeline will be drained automatically to achieve the purpose of anti-freezing.


★ Note: The inlet part and outlet part are customizable; shut-off valve and filter are proposed to be equipped on the water-supply end; Stainless steel foot treadle can be added to control the eye wash switch.

接墙式冲淋 / 洗眼器

- 材质: SS304/ABS
- 涂层: 精细抛光
- 功能: 冲淋 + 洗眼
- 球阀: 两片式快开球阀
- 管道直径: 38/48mm
- 进水口尺寸: 1"1/4-1/4" 英制内螺纹
- 喷淋水流量: $\geq 76\text{L/min}$
- 洗脸 / 洗脸水流量: $\geq 11.4\text{L/min}$

WALL-MOUNTED SHOWER & EYE WASH

- Material: Stainless Steel 304 / ABS
- Surface finishing: fine-polished
- Function: eye and face washing & showering
- Shower & eye wash switch: two-piece ball valve
- Pipe diameter: 38/48 mm
- Inlet thread: Rp 1"1/4", female
- Flow rate of body shower: $\geq 76\text{L/min}$
- Flow rate of eye/face wash: $\geq 11.4\text{L/min}$



WJH0358C



WJH0785



WJH0358D

接墙式洗眼器


- 材质: SS304
- 涂层: 精细抛光
- 功能: 眼部冲洗
- 球阀: 两片式快开球阀
- 公称压力: 1.0Mpa
- 工作压力: 0.2 ~ 0.4Mpa
- 测试压力: 1.5Mpa
- 使用环境温度: 0 ~ 40°C
- 洗脸 / 洗脸水流量: $\geq 11.4\text{L/min}$
- 进水口尺寸: 1-1/4" 英制内螺纹 / 1/2 英制内螺纹
- 排水口尺寸: 1-1/4" 英制内螺纹 / 1" 英制内螺纹

★备注: 进、排水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器


WALL-MOUNTED EMERGENCY EYE WASH

- Material: stainless steel 304
- Surface finishing: fine-polished
- Function: wash eyes and face
- Eye wash switch: two-piece ball valve
- Nominal pressure: 1.0 Mpa
- Working pressure: 0.2~0.4 Mpa
- Testing pressure: 1.5 Mpa
- Temperature requirement on working environment: 0°C~40°C
- Flow rate of eye/face wash: $\geq 11.4\text{L/min}$
- Inlet thread: Rp 1-1/4", female / RP 1/2", female
- Outlet thread: Rp 1-1/4", female / RP 1", female

★ Notes: the inlet part and outlet part are customizable; shutoff valve and filter are proposed to be equipped on the water-supply end



WJH0359C



WJH0359D

接墙式洗眼器


- 材质: SS304/ABS
- 涂层: 高亮度环氧树脂涂层
- 功能: 眼部冲洗
- 球阀: 两片式快开球阀
- 公称压力: 1.0Mpa
- 工作压力: 0.2 ~ 0.4Mpa
- 测试压力: 1.5Mpa
- 使用环境温度: 0 ~ 40°C
- 洗脸 / 洗脸水流量: $\geq 11.4\text{L/min}$
- 进水口尺寸: 1/2" 英制内螺纹
- 排水口尺寸: 1" 英制内螺纹

★备注: 进、排水口尺寸可按用户需求定制, 建议进水口设置维修应急阀门和过滤器


WALL-MOUNTED EMERGENCY EYE WASH

- Material: stainless steel 304/ ABS
- Surface finishing: glossy epoxy coated
- Function: wash eyes and face
- Eye wash switch: two-piece ball valve
- Nominal pressure: 1.0 Mpa
- Working pressure: 0.2~0.4 Mpa
- Testing pressure: 1.5 Mpa
- Temperature requirement on working environment: 0°C~40°C
- Flow rate of eye/face wash: $\geq 11.4\text{L/min}$
- Inlet thread: Rp 1/2", female
- Outlet thread: Rp 1", female

★ Notes: the inlet part and outlet part are customizable; shutoff valve and filter are proposed to be equipped on the water-supply end.



WJH0759B



WJH0759C

挂墙式紧急冲淋洗眼器


- 材质: SS304
- 安装方式: 墙壁嵌入式 (卫生节省空间)
- 功能: 洗眼 + 喷淋
- 喷淋喷头: SS304 不锈钢
- 洗眼喷头: ABS 工程塑料
- 喷淋水流量: ≥ 76 L/min
- 洗脸 / 洗眼水流量: ≥ 11.4 L/min
- 洗眼喷头: 配备双流量调节阀
- 进水口: 1" 英制内螺纹
- 排水口: 1-1/4" 英制内螺纹

★备注: 嵌入式洗眼器隔绝粉尘污染, 高效利用空间, 适用于无菌车间, 医院, 高端实验室等环境

WALL-MOUNTED EMERGENCY SHOWER & EYE WASH

- Material: stainless steel 304
- Installation: wall embedded (save space)
- Function: shower+eye wash
- Shower head: stainless steel 304
- Eye wash sprayer head: ABS engineering plastic
- Flow rate of body shower: ≥ 76 L/min
- Flow rate of eye/face wash: ≥ 11.4 L/min
- Sprayer head: each sprayer head equips with one water-flow control valve
- Inlet thread: Rp 1" female
- Outlet thread: Rp 1-1/4" female
- Notes: The embedded eye wash is isolated from dust pollution, uses space efficiently. Suitable for aseptic workshops, hospitals, high-end laboratories and other environments.

新品
NEW

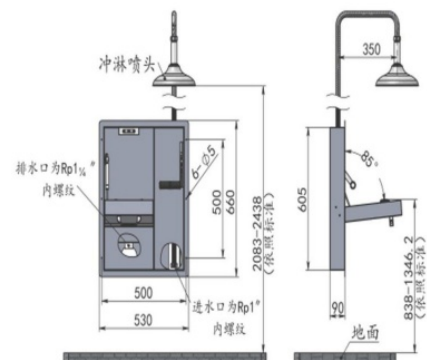

WJH1858

便携式洗眼 / 洗脸器

- 洗眼器材质: 全无毒 PE
- 颜色: 警示黄 / 浅绿色 / 环保绿
- 特点: 无需安装, 不受使用环境限制
- 容积: 10 加仑 (38L)
- 使用水源温度: 0 - 40°C
- 使用时间: ≥ 15 min
- 洗眼水流量: ≥ 1.5 L/min
- 洗眼器尺寸: 长 x 宽 x 高 = 400 x 413 x 630 mm


★备注: 需定期更换箱体内存水, 更换周期 7 天

PORTABLE EMERGENCY EYE WASH


- Material of eye wash: polyethylene (PE)
- Color: Yellow / Light Green / Green
- Features: Installation-free, no restrictions on the use environment
- Volume: 10 gallons (38 L)
- Water usage temperature: 0°C-40°C
- Usage time: ≥ 15 minutes
- Flow rate of eye wash: ≥ 1.5 L/min
- Dimensions: L / W / H : 400*413*630 mm

★ Note: weekly tank-water replacing is recommended

新品
NEW



WJH0983-01 (警示黄)



WJH0983-01 (浅绿色)



WJH0983-01 (环保绿)

便携式洗眼 / 洗脸器

- 洗眼器材质：全新无毒 PE
- 颜色：警示黄 / 浅绿色 / 环保绿
- 特点：无需安装，不受使用环境限制
- 容积：20 加仑（75L）
- 使用水源温度：0 ~ 40°C（建议安装在室内使用）
- 使用时间：≥ 15min
- 洗眼水流量：≥ 1.5 L/min
- 洗眼器尺寸：长 × 宽 × 高 = 550 × 480 × 650mm

★备注：需定期更换箱体内储水，更换周期 7 天

PORTABLE EMERGENCY EYE WASH

- Material of eye wash: polyethylene (PE)
- Color: Yellow / Light Green/ Green
- Features: Installation-free, no restrictions on the use environment
- Volume: 20 gallons (75 L)
- Ambient temperature: 0°C~40°C (indoor installation and use are proposed)
- Usage time: ≥15 minutes
- Flow rate of eye wash: ≥ 1.5 L/min
- Dimensions: L / W / H: 550*480*650 mm

★ Note: weekly tank-water replacing is recommended

新品
NEW



WJH0985-01 (警示黄)

便携式洗眼 / 洗脸器

- 洗眼器材质：全新无毒 PE
- 颜色：警示黄 / 浅绿色 / 环保绿
- 特点：无需安装，不受使用环境限制
- 洗眼器容积：20 加仑（75L）
- 推车容积：50 加仑（190L）
- 使用水源温度：0 ~ 40°C（建议安装在室内使用）
- 使用时间：≥ 15min
- 洗眼水流量：≥ 1.5 L/min
- 洗眼器尺寸：长 × 宽 × 高 = 550 × 480 × 650mm
- 推车尺寸：长 × 宽 × 高 = 690 × 530 × 740mm
- 产品特点：① 废液收集箱底部配有排水阀
② 自带万向轮，可根据现场需要随意移动，使用方便

★备注：需定期更换箱体内储水，更换周期 7 天

PORTABLE EMERGENCY EYE WASH

- Material of eye wash: polyethylene (PE)
- Color: Yellow / Light Green/ Green
- Features: Installation-free, no restrictions on the use environment
- Eye wash volume: 20 gallons (75 L)
- Trolley volume: 50 gallons (190 L)
- Ambient temperature: 0°C~40°C (indoor installation and use are proposed)
- Usage time: ≥15 minutes
- Flow rate of eye wash: ≥ 1.5 L/min
- Eye wash size: L / W / H: 550*480*650 mm
- Trolley size: L / W / H: 690*530*740 mm
- Features: 1. there is a drain valve at the bottom of the trolley
2. with universal wheel, can be moved according to the site, easy to use

★ Note: weekly tank-water replacing is recommended

新品
NEW

推车为分体式
便于
清理收集箱内部




WJH0985 (警示黄)



WJH0985-01 (浅绿色)



WJH0985-01 (环保绿)



WJH0985 (浅绿色)




WJH0985 (环保绿)

便携式洗眼 / 洗脸器

- 材质：全新无毒 PE
- 功能：洗眼洗面
- 容积：8 加仑 (30L)/16 加仑 (60L)
- 颜色：环保绿
- 使用时间：≥ 15min
- 洗眼水流量：≥ 1.5 L/min
- 使用环境温度：0 ~ 40℃ (建议安装在室内使用)
- 适用场所：广泛应用于无尘车间、石油、化工、医药、消防、电力和港口等场所。

★ 选配：可以添加移动小车及废水收集箱。

★ 备注：需定期更换箱体内存水，更换周期 7 天




WJH0982A

PORTABLE EMERGENCY EYE WASH

- Material of eye wash: polyethylene (PE)
- Function: wash eyes and face
- Volume: 8 gallons (30L)/16 gallons (60L)
- Color: Green
- Usage time: ≥ 15min
- Flow rate of eye wash: ≥ 1.5 L/min
- Ambient temperature: 0°C ~ 40°C (indoor installation and use are proposed)
- Applicable places: widely used in dust-free workshops, petroleum, chemical, pharmaceutical, fire fighting and other places.

★ Optional: You can add mobile trolley and waste water collection tank

★ Note: weekly tank-water replacing is recommended



WJH0982

便携压力式冲肤 / 洗眼器

- 材质：全新无毒 PE
- 功能：冲肤 + 洗眼
- 容积：5L
- 压力表：清晰显示压力，一目了然
- 减压阀：压力可控
- 工作压力：0.2 ~ 0.4Mpa
- 使用时间：≥ 15min
- 使用环境温度：0 ~ 40℃ (建议安装在室内使用)
- 适用场所：广泛应用于无尘车间、石油、化工、医药、消防、电力和港口等场所。

★ 备注：需定期更换箱体内存水，更换周期 7 天

PORTABLE PRESSURE HAND-HELD SHOWER/EYE WASH

- Material: polyethylene (PE)
- Function: shower + eye wash
- Volume: 5L
- Pressure gage: clearly shows the pressure, at a glance
- Pressure reducing valve: pressure controllable
- Working pressure: 0.2 ~ 0.4Mpa
- Usage time: ≥ 15min
- Ambient temperature: 0°C ~ 40°C (indoor installation and use are proposed)
- Applicable places: widely used in dust-free workshops, petroleum, chemical, pharmaceutical, fire fighting and other places.

★ Note: weekly tank-water replacing is recommended



WJH0782

便携压力式冲肤 / 洗眼器


- 材质：全新无毒 PE
- 功能：冲肤 + 洗眼
- 特点：可移动推车式
- 容积：12L
- 工作压力：0.2 ~ 0.4Mpa
- 使用时间：≥ 15min
- 使用环境温度：0 ~ 40℃ (建议安装在室内使用)
- 适用场所：广泛应用于无尘车间、石油、化工、医药、消防、电力和港口等场所。

★ 备注：需定期更换箱体内存水，更换周期 7 天

PORTABLE PRESSURE HAND-HELD SHOWER/EYE WASH

- Material: polyethylene (PE)
- Function: shower + eye wash
- Features: removable trolley
- Volume: 12L
- Working pressure: 0.2 ~ 0.4Mpa
- Usage time: ≥ 15min
- Ambient temperature: 0°C ~ 40°C (indoor installation and use are proposed)
- Applicable places: widely used in dust-free workshops, petroleum, chemical, pharmaceutical, fire fighting and other places.

★ Note: weekly tank-water replacing is recommended



WJH0782A



WJH0982 (推车版)



WJH0982A (小推车)



WJH0982 (小推车)

便携压力式冲肤 / 洗眼器

- 材质: 全新无毒 PE
- 功能: 冲肤 + 洗眼
- 容积: 35L
- 工作压力: 0.2 ~ 0.4Mpa
- 使用时间: ≥ 15min
- 使用环境温度: 0 ~ 40℃ (建议安装在室内使用)
- 适用场所: 广泛应用于无尘车间、石油、化工、医药、消防、电力和港口等场所。
- 注明: 利用蓄电池带动发动机, 电机带动压力泵, 泵内产生压力, 从而喷出雾化水。

★产品特点: 本产品自带万向轮, 可根据现场需要随意移动, 使用方便。


★备注: 需定期更换箱体内储水, 更换周期 7 天

PORTABLE PRESSURE HAND-HELD SHOWER/EYE WASH

- Material: polyethylene (PE)
- Function: shower + eye wash
- Volume: 35L
- Working pressure: 0.2 ~ 0.4Mpa
- Usage time: ≥ 15min
- Ambient temperature: 0°C ~ 40°C (indoor installation and use are proposed)
- Applicable places: widely used in dust-free workshops, petroleum, chemical, pharmaceutical, fire fighting and other places.
- Notes: Use the battery to drive the engine, and the motor to drive the pressure pump, which generates pressure in the pump to spray atomized water.

★ Product features: with universal wheel, can be moved according to the site

★ Note: weekly tank-water replacing is recommended



WJH0781

便携压力式冲肤 / 洗眼器

- 材质: 全新无毒 PE
- 功能: 冲肤 + 洗眼
- 特点: 可充电移动式
- 容积: 20L
- 工作压力: 0.2 ~ 0.4Mpa
- 使用时间: ≥ 15min
- 使用环境温度: 0 ~ 40℃ (建议安装在室内使用)

★产品特点:

- ① 具有移动轮和储水箱, 免管路安装, 并且拉杆长度可随人体高度调节, 可根据现场需要随意移动, 使用方便
- ② 加大注水口, 注水方便, 并设有 2 道过滤网
- ③ 洗眼开关端手柄模仿人体手形设计, 手感好, 操作灵活, 不用时可挂于挂架上
- ④ 专用充电器, 采用智能三段式充电 (恒流 / 恒压 / 维护), 有短路 / 过流 / 反接保护功能, 充电器指示灯显示: 红色 - 充电, 绿色 - 充满 / 待机。


★备注: 需定期更换箱体内储水, 更换周期 7 天

PORTABLE PRESSURE HAND-HELD SHOWER/EYE WASH

- Material: polyethylene (PE)
- Function: shower + eye wash
- Features: rechargeable mobile
- Volume: 20L
- Working pressure: 0.2 ~ 0.4Mpa
- Usage time: ≥ 15min
- Ambient temperature: 0°C ~ 40°C (indoor installation and use are proposed)
- Features:

- ① It has a mobile wheel and a water storage tank, free of pipeline installation, and the length of the rod can be adjusted according to the height of the human body.
- ② Enlarged the water injection port for easy water injection, and there are 2 filters
- ③ The handle of the eye wash switch valve imitates the human hand shape design, with good hand feeling and flexible operation. Can be hung on the rack when not in use.
- ④ Special charger, using intelligent three-stage charging (constant current / constant voltage / maintenance), with short circuit / over current / reverse connection protection function, The charger indicator shows: red-charging, green-full / standby

★ Note: weekly tank-water replacing is recommended



WJH0781-1

移动式洗眼器

- 材质: SS304
- 功能: 洗眼洗面
- 容积: 8L
- 压力表: 清晰显示压力, 一目了然, 安全放心
- 泄压阀: 压力可控
- 工作压力: 0.2 ~ 0.4Mpa
- 使用时间: ≥ 15min
- 使用环境温度: 0 ~ 40℃ (建议安装在室内使用)
- 适用场所: 广泛应用于无尘车间、石油、化工、医药、消防、电力和港口等场所。

★备注: 需定期更换箱体内储水, 更换周期 7 天

REMOVABLE EYE WASH

- Material: stainless steel 304
- Function: wash eyes and face
- Volume: 8L
- Pressure gauge: clearly shows the pressure, at a glance, safe and secure
- Pressure relief valve: pressure controllable
- Working pressure: 0.2 ~ 0.4Mpa
- Usage time: ≥ 15min
- Ambient temperature: 0°C ~ 40°C (indoor installation and use are proposed)
- Applicable places: widely used in dust-free workshops, petroleum, chemical, pharmaceutical, fire fighting and other places.

★ Note: weekly tank-water replacing is recommended



WJH1602

移动式洗眼器

- 材质: SS304
- 功能: 洗眼洗面
- 容积: 10 加仑
- 压力表: 清晰显示压力, 一目了然
- 压力调节阀: 压力可控
- 工作压力: 0.2 ~ 0.4Mpa
- 使用时间: ≥ 15min
- 使用环境温度: 0 ~ 40℃ (建议安装在室内使用)
- 适用场所: 广泛应用于无尘车间、石油、化工、医药、消防、电力和港口等场所。

★产品特点: 本产品自带万向轮, 可根据现场需要随意移动, 使用方便。


★备注: 需定期更换箱体内储水, 更换周期 7 天

REMOVABLE EYE WASH

- Material: stainless steel 304
- Function: wash eyes and face
- Volume: 10L
- Pressure gauge: clearly shows the pressure, at a glance, safe and secure
- Pressure relief valve: pressure controllable
- Working pressure: 0.2 ~ 0.4Mpa
- Usage time: ≥ 15min
- Ambient temperature: 0°C ~ 40°C (indoor installation and use are proposed)
- Applicable places: widely used in dust-free workshops, petroleum, chemical, pharmaceutical, fire fighting and other places.

★ Features: with a universal wheel, can be moved according to the site

★ Note: weekly tank-water replacing is recommended



WJH0659

台式移动洗眼器

- 材质：加厚铜质
- 壳体材质：ABS(可拆卸)
- 使用功能：洗眼 / 脸
- 开关：具有自锁功能，开关灵活方便
- 洗眼喷头：软性橡胶，出水经缓压处理呈泡沫状水柱，避免对患处二次伤害。
- 防尘盖：PP 材质，使用时自动被水冲开。
- 软管：长度 1400mm，软性 PVC 管外覆不锈钢网，外层包覆 PE 管，有效防止生锈、渗漏
- 工作压力：0.2 ~ 0.4 Mpa
- 洗眼水流量：≥ 1.5 L/min
- 进水口尺寸：1/2" 英制内螺纹
- 安装方式：台面 / 壁挂

★使用说明：使用时，从台面固定座中抽出洗眼器主体，用拇指按下推钮同时向前推，开关阀门开启并锁住水流，即可冲洗；冲洗完毕，拉回推钮并松开，开关阀门即关闭，然后将洗眼器主体复位到台面固定座中

BENCH-MOUNT/HAND-HELD EYE WASH

- Body: Solid brass
- Materials: ABS(demountable)
- Function: eye and face washing
- Water locking switch: With self-locking function, the switch is flexible and convenient
- Eyewash nozzle: soft rubber, outgoing water is depressurized to avoid secondary injury to eyes
- Dust cover: polypropylene made, would be opened by outgoing water flow
- Supply Hose: The length of 1.5 meters, a flexible PVC pipe is coated by stainless steel wire mesh, coated PE tube, effectively prevent rusting and leaking
- Working pressure: 0.2~0.4Mpa
- Flow of eye wash: ≥1.5 L/min
- Inner size: Rp1/2" female

★ Instruction: take out the eye wash from the bench holder, press and push forwardly the button by thumb, then the switch would reach "ON" state and water flow would be constantly supplied to wash injury; when finished, just push backwardly and release the button to close.



WJH2155-1



WJH2155-4

台式移动洗眼器

- 主体：加厚铜质
- 涂层：高亮度超厚电镀层，耐腐蚀、耐热，防紫外线辐射
- 洗眼喷头：软性橡胶，出水经缓压处理呈泡沫状水柱，防止冲伤眼睛
- 防尘盖：PP 材质，使用时自动被水冲开
- 开关：水流在 1 秒种内快速启动，方便使用
- 控水阀：止逆阀，其阀门可自动关闭
- 软管：供水软管长度 1.4 米，软性 PVC 管外覆不锈钢网
- 水压：最大耐压 7 巴

★选择： 1. 可供台式 / 壁式安装方式 2. 可供单 / 双喷淋头 3. 可供洗瓶器

BENCH-MOUNT/HAND-HELD EYE WASH

- Body: Solid brass
- Coating: High gloss thick plating coating, resistant to chemicals, UV fading and heat
- Eyewash nozzle: soft rubber, outgoing water is depressurized to avoid secondary injury to eyes
- Dust cover: polypropylene made, would be opened by outgoing water flow
- Switch: prompt response makes water coming out within 1 second
- Water-control valve: non-return valve, which is self-closing
- Hose: the water inlet hose, with length of 1.4 meters, is soft PVC tube covered by stainless steel wire mesh
- Maximum working pressure: 7 bar

★ More options:
1.Desk/wall mounted available
2.Single/double spray head(s) available
3.Bottle wash available




WJH0355



WJH0355A

台式可旋转双口洗眼器

- 主体材质：加厚铜质。
- 功能：洗眼洗面
- 涂层：高亮度超厚电镀层，耐腐蚀、耐热，防紫外线辐射。
- 洗眼喷头：出水经缓压处理呈泡沫状水柱，避免对患处二次伤害。
- 防尘盖：使用时自动被水冲开。
- 推板开关：用手推一下推板，即可洗眼、洗面，方便使用。
- 球阀：两片式 304 快开球阀。
- 水压：0.2 ~ 0.4Mpa
- 安装方式：台式
- 特点：供水弯管部分可以 360° 旋转，使用方便



WJH1555A

BENCH-MOUNT/HAND-HELD EYE WASH

- Body: Solid brass
- Function: eye and face washing
- Coating: High gloss thick plating coating, resistant to chemicals, UV fading and heat
- Eyewash nozzle: soft rubber, outgoing water is depressurized to avoid secondary injury to eyes
- Dust cover: could be easily opened by outgoing water flow
- Push-board switch: by pushing the board by hand, one can wash eyes, face
- Ball valve: two-piece-type quick opening 304 stainless steel ball valve
- Working pressure: 0.2~0.4Mpa
- Installation method: to be mounted on bench top
- Feature: the water inlet tube could be rotated by 360 degree

台式移动洗眼器

- 材质：加厚铜质
- 涂层：高亮度超厚电镀层，耐腐蚀、耐热，防紫外线辐射
- 功能：洗眼洗脸
- 洗眼喷头：软性橡胶，出水经缓压处理呈泡沫状水柱，避免对患处二次伤害
- 防尘盖：PP 材质，使用时自动被水冲开
- 水压：0.2 ~ 0.4Mpa。
- 特点：具有冷、热水混合功能，发生事故冲洗和实验室正常供水两种用途。整体安装于台面，冲洗部分配有供水软管扩大冲淋范围。供水弯管可以 360° 旋转，使用方便

BENCH-MOUNT/HAND-HELD EYE WASH

- Body: Solid brass
- Function: eye and face washing
- Coating: High gloss thick plating coating, resistant to chemicals, UV fading and heat
- Eyewash nozzle: soft rubber, outgoing water is depressurized to avoid secondary injury to eyes
- Dust cover: polypropylene made, would be opened by outgoing water flow
- Push board: push the board by hand, you can wash your eyes and face, easy to use
- ball valve: SS304
- Working pressure: 0.2~0.4Mpa

★ Features: With cold and hot water mixing function, it has accident flushing and normal water supply in the laboratory. The washing part is equipped with water supply hose to extend the washing range. The water supply elbow can be rotated 360 times for easy operation.




WJH0711D

台上洗眼器

- 主体材质：不锈钢
- 功能：洗眼洗脸
- 表面处理：拉丝工艺
- 洗眼喷头：专利设计，自带双流量调节阀
- 防尘盖：主体一体式设计不易丢失，使用时自动被水冲开。
- 标识：开关标识置于推板正面，提示开关方向，醒目清晰
- 推板：用手推一下推板，即可洗眼、洗面，方便使用
- 球阀：两片式 304 快开球阀
- 水压：0.2 ~ 0.4Mpa
- 安装方式：台式

BENCH-MOUNT EYE WASH

- Body: SS304
- Function: eye and face washing
- Surface finishing: sanded
- Spray head feature: patented design, each spray head equips with one water-flow control valve
- Dust cover: could be easily opened by outgoing water flow
- Sign: the sign, on the push-board, clearly shows the pushing direction to open
- Push-board switch: by pushing the board by hand, one can wash eyes, face
- ball valve: SS304
- Working pressure: 0.2~0.4Mpa
- Installation method: to be mounted on bench top



WJH1555



WJH0759D

洗眼喷头

- 喷头自带流量调节功能，适用水压范围广
- 具有过滤整流功能，使水束柔和，水流丰富充足
- 防尘功能：自带防尘盖，并能在水压作用下自动打开，使用方便，清洁卫生
- 防尘盖自带挂环且 360° 度转动并可任意定位，使用方便，避免不慎丢失
- The sprinkler has its own flow regulation function, which is suitable for a wide range of water pressure
- It has the function of filtering and rectifying, which makes the water soft and abundant
- Dust-proof function: self-contained dust-proof cover, and can automatically open under the action of water pressure, easy to use, clean and hygienic
- Dust-proof cover has its own hanging ring and can be rotated 360 degrees and positioned arbitrarily. It is easy to use and avoid accidental loss



★ 防尘盖自带挂环且 360° 转动并可任意定位，使用方便，避免不慎丢失

★ Dust-proof cover has its own hanging ring and can be rotated 360° degrees and positioned arbitrarily. It is easy to use and avoid accidental loss

进口洗眼液 Imported Eyewash



WJH4801

洗眼液
Eyewash

◆ Plum 酸碱中和眼部及皮肤冲洗液

所含的 4.9% 的无菌磷酸盐缓冲液能够快速有效的综合酸碱溶液。实验证明它既安全又有效。这款洗眼液能快速的中和酸碱溶液，同时对眼睛不会产生任何的危害。

PH Neutral: 4.9% sterile phosphate buffer for a rapid and effective neutralising of acids and alkali. Documented safety and effect. The fluid neutralises acids and alkali fast and with no danger for the eye.



WJH4604

洗眼液
Eyewash

◆ Plum 眼部及皮肤冲洗液

所含的 0.9% 无菌氯化钠溶液与人体自然眼液相当。主要适用于灰尘、脏污、异物的冲洗，及在使用酸碱中和洗眼液之后继续用来冲洗其他化学物质等。

Plum Eye Wash: 0.9% sterile sodium chloride solution corresponding the eye's natural fluid. Suitable for dust, dirt, foreign bodies, other chemicals and for the continuous rinsing after PH Neutral



WJH4694

洗眼液 (加挂挂板)
Eyewash (with bracket)



WJH0783

洗眼液 (32 盎司)
Eyewash (32 ounces)



WJH4695

洗眼液 (加挂挂板)
Eyewash (with bracket)



WJH0783A

洗眼液 (16 盎司)
Eyewash (16 ounces)



WJH0783B

洗眼瓶
Eyewash bottle

- 1、冲肤洗眼瓶，仅作为紧急处理，处理后必须立即就医。
- 2、加纯净水 500ml，每 90 天应换纯净水。
- 3、容器均由聚乙烯无毒材料制造。

- 1, Flush skin eyewash, only as an emergency treatment, you must seek medical advice immediately after processing treatment.
- 2, add 500ml of pure water, pure water should be changed every 90 days.
- 3, containers are made of polyethylene, non-toxic materials.

您只有两只眼睛 --- 一定要保护好它们!
You only have two eyes take care of them!



1. 从挂板上洗眼液
Remove the bottle from the station



2. 旋转瓶盖将内部封口打开
Twist the lid until the seal breaks



3. 倾斜头部，开始冲洗
Tilt your head and rinse

洗眼器可选配件清单表

List of optional accessories for eye washer



WJH1515
防爆电源开关
Explosion-proof power switch



WJH1516
防爆行程开关
Explosion-proof position switch



WJH1517
防爆照明灯
Explosion-proof lighting



WJH1518
防爆声光报警灯
Explosion-proof acousto-optic alarm lamp



WJH1519
ABS 冲淋头
ABS shower head



WJH1520
ABS 洗眼盆
ABS eye wash bowl



WJH1521
不锈钢冲淋头
Stainless steel shower head



WJH1522
不锈钢洗眼盆
Stainless steel eye wash bowl



WJH1527
不锈钢拉杆
Stainless steel pull rod



WJHPT05
ABS 冲淋头
ABS shower head



WJH1523
ABS 推板
ABS push board



WJH1524
ABS 变径头
ABS reducer



WJH1525
不锈钢球阀 (1")
Stainless steel ball valve (1")



WJH1526
不锈钢球阀 (1/2")
Stainless steel ball valve (1/2")



WJH1528
不锈钢变径 (1" 变 1/2")
Stainless steel reducer (1" to 1/2")



WJH1529
不锈钢变径 (1" 变 3/4")
Stainless steel reducer (1" to 3/4")



WJH1530
不锈钢变径 (1 1/4" 变 1/2")
Stainless steel reducer (1 1/4" to 1/2")



WJH1531
不锈钢变径 (1 1/4" 变 3/4")
Stainless steel reducer (1 1/4" to 3/4")



WJH1532
过滤器 (1/4")
Filter (1/4")



WJH1533
洗眼双喷头
Eye wash sprayer heads



WJH0358-12
洗眼双喷头 (可调节)
Eye wash sprayer heads, each spray head equips with water-flow control



WJH1535
不锈钢脚踏板
Stainless steel pedal



WJH1537
不锈钢壁式支架
Stainless Steel Wall Bracket



WJH1538
PP 洗眼器排水管
Eye wash drain - pipe



Visit Factory

360° VR panoramas we provide

<http://www.yrftextile.com>

Email: info@yrftextile.com

Whatsapp: +8613702995607